

WWW.EVERKEMPRODUCTS.COM



# EVERKEM DIVERSIFIED PRODUCTS PRODUCT CATALOG



**EVERKEM™**  
DIVERSIFIED PRODUCTS



**PASSION. PERFORMANCE. RELIABILITY. SERVICE.  
IT'S WHO WE ARE. IT'S WHAT WE DO.**

**THE EVERKEM DIVERSIFIED PRODUCTS CATALOG**

Over forty pages of caulks, sealants, adhesives, firestopping, foam sealants and more. Designed with performance in mind, manufactured by passionate individuals to the highest standards of quality, and backed by unparalleled service and support for people who want the job done right - this time, next time, every time.

# TABLE OF CONTENTS

<b>About Everkem.....</b>	<b>2</b>
<b>EcoSeal Information.....</b>	<b>4</b>
<b>SEAL TITE High Performance Sealants.....</b>	<b>8</b>
Latex Sealants.....	10
Silicone Sealants.....	12
Hybrid Polymer Sealants.....	14
<b>FLAME TECH Firestopping Products.....</b>	<b>16</b>
Commercial Firestopping.....	18
Residential Fireblocking.....	22
Specialty Sealants / Adhesives.....	23
<b>Foam Sealants.....</b>	<b>24</b>
<b>ELECTRAKEM Electrical Chemicals.....</b>	<b>30</b>
Wire Pulling Lubricants.....	32
Oxide Inhibitor Compound.....	33
<b>Tools &amp; Accessories.....</b>	<b>34</b>
Caulking Guns.....	36
Foam Guns.....	37
Fastening Tools.....	38
Cutting Tools.....	39
<b>Warranties, Terms, Conditions.....</b>	<b>40</b>

**Sealant: noun \se-lent\; is a viscous material that once applied, changes state to become solid, and is used to prevent the penetration of air, gas, noise, dust, fire, smoke or liquid from one location through a barrier into another. We are proud to be a manufacturer of caulks & sealants as the very definition of “sealant” shows the importance and the vital role that sealants play in energy conservation, as a safeguard from air and noise pollution, the preservation of personal property, and most importantly, the protection of human health and well-being.**

**Everkem Diversified Products specializes in the manufacture of sealants, adhesives and specialty chemical compounds used for construction and industrial applications.**

**Located in Winston-Salem, NC, the Everkem foundation is built upon innovative manufacturing capabilities, progressive product solutions and old fashioned personal service and customer support. We believe that the most essential ingredient to building successful partnerships is with the commitment to exceed the expectations of those we serve.**

**ecoseal**  
LOW VOC CONTENT  
ECO-FRIENDLY



**AcuraSeal**

**ACRYLIC URETHANE ELASTOMERIC SEALANT**  
High Performance Sealant with Outstanding Durability  
Maximum Adhesion and Flexibility  
Meets or Exceeds ASTM C520



**FIRE CAULK**

One Family Fireblocking Caulk  
Meets or Exceeds ASTM E813 Test Standard  
Meets or Exceeds NFPA 261 Fire Test Standard



**FIRE SEAL**  
Residential Firestopping Caulk  
Meets or Exceeds NFPA 261 Fire Test Standard



**EvosSeal MS**

**PERFORMANCE SEALANT AND ADHESIVE**  
Works in Severe Climates and Extreme Environmental Conditions  
Meets or Exceeds ASTM C215 and Color Stable

**EVERKEM**  
DIVERSIFIED PRODUCTS

## **EVERKEM'S ECOSEAL STAMP OF APPROVAL**

**We recognize the importance of environmental responsibility in our role as a manufacturer of caulks, sealants and specialty compounds.**

**Starting with our pursuit for the cleanest and safest raw materials sourced from local suppliers and vendors in close proximity, to our innovative manufacturing process and product formulations,**

**Everkem Diversified Products is committed to the movement towards sustainability in the built environment and playing our part to help build a greener world.**

## V.O.C CONTENT

The EcoSeal stamp shown is a user friendly symbol that specifies which products within our various product lines are “Eco Safe” and qualify as a low V.O.C. content sealant or adhesive which meets one or more of the following guidelines:

- The U.S. Green Building Council’s (USGBC) LEED Green Building Rating System *Indoor Environmental Quality (EQ) Credit 3.1 Construction IAQ Management Plan, During Construction (1 pt) and Credit 4.1 Low-Emitting Materials, Adhesives & Sealants (1 pt)*
- National Association of Home Builders (NAHB) Model GREEN Home Building *Section 7 Global Impact, Item 7.1.3 Use Low-VOC Sealants (5 pts)*
- The South Coast Air Quality Management District (SCAQMD)
- The Bay Area Air Quality Management District (BAAQMD)
- Ozone Transport Commission (OTC)
- California Air Resources Board (CARB)

## ENERGY EFFICIENCY

Creating an air tight building envelope to limit air infiltration and leakage is an essential component to improving energy efficiency and conservation. In addition to the International Energy Conservation Code Mandates, the use of caulks and sealants to seal the building envelope are applicable to the following guidelines:

- The U.S. Green Building Council’s (USGBC) LEED Green Building Rating System *Energy & Atmosphere (EA) Prerequisite 2 – Minimum Energy Performance (Required) and Credit 1 – Optimize Energy Performance (1-10 pts)*
- National Association of Home Builders (NAHB) Model GREEN Home Building Guidelines *Section 3 Energy Efficiency Item 3.3.1 Building Envelope – Incorporate Air Sealing Package to Reduce Infiltration (10 pts)*



LOW VOC CONTENT

# eco seal

ECO-FRIENDLY

SealTite®

## EcoTex-25

ACRYLIC LATEX CAULK WITH 25 YEAR DURABILITY

ASTM C-834

SealTite®

## SITEX-40

ACRYLIC LATEX CAULK WITH 40 YEAR DURABILITY

SealTite®

## HU-TEMP-SILICONE

High Temperature Red Acetoxy Silicone Sealant

Permanently Flexible -85° F to 500° F

Short Term Exposure to 600° F

SealTite®

## FIRESTOP-814

FLUOROPOLYMER INTUMESCENT FIRESTOPPING SEALANT

ASTM E814/UL 1470 test standards

**EVERKEM™**

DIVERSIFIED PRODUCTS



## HIGH PERFORMANCE. NO COMPROMISES. SEAL TITE HIGH PERFORMANCE SEALANTS

The Seal Tite High Performance Sealant Line combines trusted product performance with responsive and dependable customer support.

Formulated with long term durability in mind, our consistent quality and timely delivery is the cornerstone of the Everkem foundation. Ranging from an economical 25 year acrylic latex caulk to the most state-of-the-art hybrid sealants, our extensive product solutions ensure the best sealant for the most difficult applications.



# SEAL TITE HIGH PERFORMANCE SEALANTS



The Seal Tite Line Of High Performance Sealants

## ECOTEX 25 25 Year Acrylic Latex Caulk



EcoTex 25 is an economical caulking material, meeting ASTM-C834 standards and is suitable for multiple interior and exterior applications including the sealing and bonding of joints, and pre-painting applications.

### Packaging Options

Part #	Description	Case Qty.
ET25-10W	10.3 oz. tube - White	12 Tubes
ET25-28W	Quart tube - White	12 Tubes
ET25-5W	5 gallon pail - White	Each



### Specifications:

- Meets ASTM-C834

### Features:

- 25 year durability
- Economical
- Easily applied
- Excellent adhesion
- Permanently flexible
- Paintable
- Low V.O.C.'s



## SILTEX 40 40 Year Siliconized Acrylic Latex Caulk



SilTex 40 meets ASTM-C834 performance standards and forms a long lasting thermal and moisture protective seal between most building materials. SilTex 40 offers 40 year durability, is paintable, and mildew resistant.

### Packaging Options

Part #	Description	Case Qty.
ST40-10W	10.3 oz. tube - White	12 Tubes
ST40-28W	Quart tube - White	12 Tubes
ST40-5W	5 gallon pail - White	Each



### Specifications:

- Meets ASTM-C834

### Features:

- 40 year durability
- Economical
- Easily applied
- Smooth consistency
- Excellent adhesion
- Mildew resistant
- Paintable
- Low V.O.C.'s



**Specifications:**

- Meets ASTM-C920

**Features:**

- 50 year durability
- 12.5% joint movement
- Excellent adhesion
- Permanently flexible
- Mildew resistant
- Paintable
- Low V.O.C.'s



AcuraSeal meets ASTM-C920 performance standards and offers 50 year durability. AcuraSeal is designed for top quality interior and extreme exterior applications across a variety of common substrates.

**Packaging Options**

Part #	Description	Case Qty.
AS-10W	10.3 oz. tube - White	12 Tubes
AS-28W	Quart tube - White	12 Tubes
AS-5W	5 gallon pail - White	Each



# TRUSIL 100

## 100% Silicone Sealant

**Specifications:**

- NSF 51 Certified
- Meets ASTM-C920
- Meets FDA Regulation No. 21 CFR 177
- Meets Federal Specs TT-S-00230C  
TT-S-01543A

**Features:**

- 100% Silicone
- High temp performance (Up to 400°F)
- Low temp flexibility (As low as -55°F)
- 25% joint movement
- Mildew resistant options available
- Low V.O.C.'s



TruSil 100 is a premium, 100% Silicone sealant that demonstrates high strength adhesion to many common substrates, and excellent weatherability under the most extreme conditions.

TruSil 100 is an NSF 51 Certified Sealant, making it the ideal sealant to use in and around food processing and storage.

**Packaging Options**

Part #	Description	Case Qty.
TS-100C	10.1 oz. tube - Clear	12 Tubes
TS-100W	10.1 oz. tube - White	12 Tubes
TS-100B	10.1 oz. tube - Black	12 Tubes
TS-100A	10.1 oz. tube - Aluminum	12 Tubes
TS-100MRC	10.1 oz. tube - Mildew Resistant Clear	12 Tubes
TS-100MRW	10.1 oz. tube - Mildew Resistant White	12 Tubes
TS-100MRTW	10.1 oz. tube - Mildew Resistant Trans White	12 Tubes



Trusil 100's 100% silicone formulation provides greater adhesion, minimal shrinkage, higher temperature resistance & lower temperature application, and overall increased performance over lesser "extended" formulations.

TruSil comes in an improved cartridge, designed with a removable nozzle which allows for easy cleaning, storage, and reuse after product has been opened. When using multiple tubes for a project, simply change nozzles between tubes to keep bead sizes consistent.

An added screw-on tip reduces wastes and costs by limiting the product's exposure to moisture between uses, helping to prevent premature curing.

Trusil 100 is NSF certified, making it safe for applications that may come into contact with food such as kitchen & restaurant sinks, counters and walls; residential, commercial, and industrial appliance manufacture, installation, and repair; meat, produce, and other food displays, as well as food transportation & delivery vehicles.

# HI-TEMP SILICONE

## High Temperature 100% Silicone Sealant

Hi-Temp Silicone is a 100% silicone sealant designed for sealing and bonding applications with continuous exposure to temperature ranges of -85°F to 500°F, with intermittent exposure to 600°F. Hi-Temp silicone adheres to a wide array of common substrates such as glass, wood, porcelain, and a variety of plastics, metals, and rubbers.

Hi-Temp Silicone is NSF 51 Certified, making it the superior choice for high temperature applications in and around food processing and storage.

### Packaging Options

Part #	Description	Case Qty.
HTS-100	10.1 oz. tube - Red	12 Tubes



Hi-Temp Silicone is NSF certified, making it the ideal choice for high temperature applications where food contact may occur including sealing stove and furnace vent pipes, sealing and encapsulating heating elements, high temperature ductwork, and the manufacture and repair of smokers, grills, etc.

### Specifications:

- NSF 51 Certified
- Meets ASTM-C920
- Meets FDA Regulation No. 21 CFR 177.2600
- Meets Federal Specs TT-S-001543A TT-S-00230C

### Features:

- 100% Silicone
- High temperature performance
- Low temperature flexibility
- Intermittent exposure up to 600°F
- 25% joint movement
- Mildew resistant
- Low V.O.C.'s



**EVOSEAL MS****High Performance Hybrid Polymer Sealant**

EvoSeal MS High Performance Sealant is the evolution of high performance sealants. EvoSeal is a state-of-the-art hybrid polymer chemistry designed to withstand severe climate, weathering, and environmental conditions encountered in roofing, siding, and many other construction and industrial applications.

EvoSeal MS possesses excellent adhesion to a wide variety of substrates including:

- EPDM rubber roofing
- Aluminum
- Kynar coated materials
- PVC
- Vinyl
- Steel
- Glass
- Marble
- Brick
- Concrete
- Wood
- Many plastics





# THE EVOLUTION OF HIGH PERFORMANCE SEALANTS

HYBRID SEALANTS

SEAL TITE  
SEALANTS & ADHESIVES



### Specifications:

- Meets ASTM-C920 Type S, Grade NS, Class 25
- Meets ASTM-G26
- Meets AAMA Certifications  
802.3-10  
803.3-10  
805.2-10  
808.3-10
- Meets Federal Spec TTS-0230C

### Features:

- UV Resistant
- Applies to wet surfaces
- Can be applied in temperatures as low as 30°F
- Non-yellowing
- Permanently Flexible
- Low V.O.C.'s



### Packaging Options

Part #	Description	Case Qty.
ES10W	10.3 oz. tube - White	12 tubes
ES10G	10.3 oz. tube - Gray	12 tubes
ES10B	10.3 oz. tube - Black	12 tubes
ES10DB	10.3 oz. tube - Dark Bronze	12 tubes
ES10T	10.3 oz. tube - Tan	12 Tubes





## **FIRESTOP WITH CONFIDENCE. FIRESTOP WITH FLAME TECH.**

The Flame Tech Firestopping Product Line offers an array of product solutions for single family fireblocking and multi-family and commercial firestopping applications. Backed by comprehensive UL testing and experienced technical support, our high quality products have been the reliable choice for specifiers, distributors and contractors, for over 15 years.



# FLAME TECH FIRESTOPPING



The Flame Tech Line Of Firestopping Products

# FIRESTOP-814+ Intumescent Elastomeric Firestopping Caulk

**Specifications:**

- Tested to ASTM-E814
- Tested to ASTM-E1966
- UL Classified
- Meets 51 STC Rating

**Features:**

- Intumescent
- Elastomeric
- Up to 3 hour fire rating
- Chemically compatible with FlowGuard Gold®, BlazeMaster®, and Corzan® pipe fittings
- Chemically compatible with all PVC, CPVC, ABS, PEX tubing and other applicable tested penetrating items
- Excellent freeze / thaw
- Smooth consistency
- Identifiable color
- Low V.O.C.'s



Firestop-814+ Elastomeric Intumescent Firestop Sealant offers comprehensive UL Testing for a wide range of electrical, plumbing, HVAC and head-of-wall applications for “Through Penetrations” found in 1 & 2 hour fire rated wood, gypsum and concrete floor & wall assemblies in multi-family and commercial firestopping applications.

**Packaging Options**

Part #	Description	Case Qty.
FS814+	10.3 oz. tube - Coral Red	12 Tubes
FS814+20	20 fl. oz. sausage tube - Coral Red	24 Tubes
FS814+28	Quart tube - Coral Red	12 Tubes
FS814+5	5 gallon pail - Coral Red	Each



# FLAME GUARD-814

## Non-Intumescent Firestopping Caulk

Flame Guard-814 is an economical, non-combustible, non-intumescent commercial firestopping sealant designed for use in 1 & 2 hour fire - rated concrete floor and wall assemblies when penetrated by plumbing, electrical, and other mechanical items.

Flame Guard-814 has been tested, classified, and is approved to be used as a filler for "Through-Penetration" firestop systems.

### Packaging Options


Part #	Description	Case Qty.
FG814+	10.3 oz. tube - Coral Red	12 Tubes
FG814+28	Quart tube - Coral Red	12 Tubes
FG814+5	5 gallon pail - Coral Red	Each

### Specifications:

- UL Classified
- Tested to ASTM-E814

### Features:

- 2 hour fire rating
- Great adhesion
- Smooth consistency
- Identifiable color
- Low V.O.C.'s

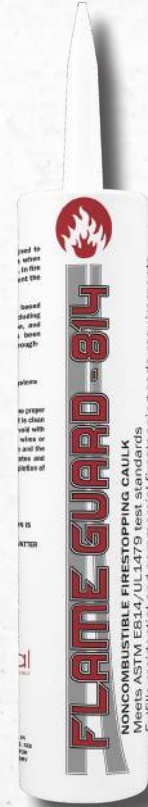

# PILLOWS

## Intumescent Firestop Pillows

2" x 4" x 8" Intumescent Firestop Pillows are UL tested to maintain up to a 3 hour fire rating, are easily stackable, self-supporting pillows - requiring no mesh or sealant.

Firestop Pillows are designed to firestop large temporary or frequently accessed openings which can contain cables, cable trays, blank openings, or several penetrating items.

### Packaging Options

Part #	Description	Case Qty.
AD-PLLW	2" x 4" x 8" Intumescent Firebarrier Pillows	25 Pillows

### Specifications:

- Tested to ASTM E-814
- UL Classified

### Features:

- 3 hour fire rating
- Intumescent
- Ready to use
- Easy to install
- Lightweight
- Economical
- Self-supporting



## WRAP STRIPS

### Intumescent Wrap Strips

Wrap strips are highly intumescent firestopping material used primarily for plastic and insulated pipe applications. When heated, wrap strips expand and form a hard char to prevent the passage of flame, smoke, and toxic gases.

**Specifications:**

- Tested to ASTM-E814
- UL Classified

**Features:**

- Intumescent
- Cost effective
- Flexible
- Ready to use
- Easy installation

Packaging Options

Part #	Description	Case Qty.
WS-1	1" x 1/4" x 144" Intumescent Wrap Strip	6 Boxes
WS-2	2" x 1/4" x 144" Intumescent Wrap Strip	4 Boxes



## FIRESTOP COLLARS

### Intumescent Firestop Collars

Intumescent firestop collars consist of a steel collar and an intumescent strip suitable for 1½", 2", 3", and 4" nominal trade pipes. Collars are to be fastened around plastic pipes where they penetrate fire rated floors and walls.

**Specifications:**

- Meets ASTM-E814
- UL Classified

**Features:**

- Intumescent
- Economical
- Easy to install
- Reduces labor costs

Packaging Options

Part #	Description	Case Qty.
Clr-1	1.5" Intumescent Firestop Collar	12 Collars
Clr-2	2" Intumescent Firestop Collar	12 Collars
Clr-3	3" Intumescent Firestop Collar	12 Collars
Clr-4	4" Intumescent Firestop Collar	12 Collars



# PUTTY STICKS

## Fire Rated Intumescent Putty Sticks

Fire rated putty sticks are UL classified, 66.2 in<sup>3</sup> intumescent putty intended for use as an economical, labor saving firestop system component where removal and maintenance of the penetrants or system may be needed.

### Packaging Options

Part #	Description	Case Qty.
AD-PTTY	66.2in <sup>3</sup> (1085 cm <sup>3</sup> ) Intumescent Putty Sticks	12 Sticks

### Specifications:

- Tested to ASTM-E814
- UL Classified

### Features:

- Intumescent
- 4 hour fire rating
- Flexible
- Non-curing
- Ready to use
- Easy installation



# PUTTY PADS

## Fire Rated Intumescent Putty Pads

Putty pads are non-curing, 7" x 7" x 1/8" pads designed to seal around electrical boxes to maintain the hourly integrity of fire rated walls by restricting the passage of flame, smoke, and toxic gases. UL Classified for 1 & 2 hour gypsum fire rated wall systems

### Packaging Options


Part #	Description	Case Qty.
FT-00732	7" x 7" x 1/8" Intumescent Putty Pad	20 Pads

### Specifications:

- UL Classified

### Features:

- 2 hour fire rating
- Non-curing
- Identifiable color
- No asbestos fillers
- Long shelf life
- Easy installation

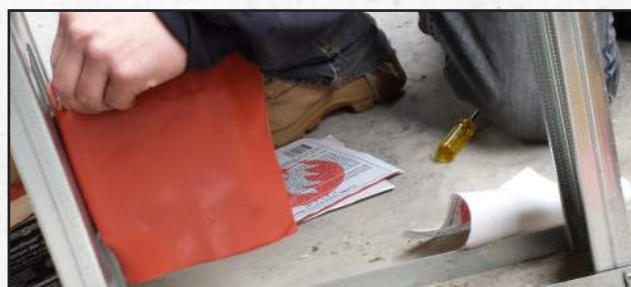

## FIRE SEAL 136

### Single Family Fireblocking Caulk

Fire Seal 136 is tested to meet and exceed ASTM-E136 and ASTM-E814 standards for fireblocking / firestopping single-family residential construction. Fire Seal 136 creates an air-tight barrier to prevent the passage of flames, smoke, and hot gases from spreading area to area within concealed spaces.

#### Packaging Options

Part #	Description	Case Qty.
FS136	10.3 oz. tube - Brick Red	12 Tubes
FS136-28	Quart tube - Brick Red	12 Tubes
FS136-5	5 gallon pail - Brick Red	Each

#### Specifications:

- Tested to ASTM-E136
- Tested to ASTM-E814

#### Features:

- 2 hour fire rating
- Chemically compatible with FlowGuard Gold® BlazeMaster® and Corzan® pipe fittings as well as all PVC, CPVC, ABS, PEX tubing and other applicable tested penetrating items.
- Smooth consistency
- Identifiable color
- Low V.O.C.'s



## FIRE CAULK 136

### Single Family Fireblocking Caulk

Fire Caulk-136 is an economical, noncombustible material used to fill the annular space around wires, pipes, ducts, and other mechanical penetrating items in steel and wood-framed single family residential construction.

Fire Caulk is tested to ASTM-E136 standard for non-combustibility and fulfills fireblocking requirements by resuming the integrity of non-rated penetrations through top plates and ceiling and floor openings.

#### Packaging Options

Part #	Description	Case Qty.
FC136	10.3 oz. tube - Bright Orange	12 Tubes
FC136-5	5 gallon pail - Bright Orange	Each

#### Specifications:

- Tested to ASTM-E136

#### Features:

- Great adhesion
- Chemically compatible with FlowGuard Gold® BlazeMaster® and Corzan® pipe fittings as well as all PVC, CPVC, ABS, PEX tubing and other applicable tested penetrating items.
- Smooth consistency
- Identifiable color
- Low V.O.C.'s





# SOUND SEAL 90 **Acoustical Sound & Smoke Sealant**

SoundSeal 90 is a high quality, latex based sealing compound used in construction assemblies, designed specifically for achieving and maintaining the required STC (Sound Transmission Class) value of the system.

### Packaging Options

Part #	Description	Case Qty.
SS90-28	Quart tube - white	12 Tubes



### Specifications:

- Meets ASTM-C834
- Tested to ASTM-E90
- Tested to ASTM-E84
- Maintains 52 STC

### Features:

- Excellent adhesion
- Permanently flexible
- Mildew Resistant
- Paintable
- Low V.O.C.'s



# FIRE PATCH **Furnace & Retort Cement**

Fire Patch is a one-part, high temperature refractory and retort cement used to repair and seal openings, cracks, joints and seams encountered in furnaces, fireboxes, chimneys, stoves, flue pipes and many other refractory applications.

Fire Patch can withstand temperatures in excess of 2700°F and is classified as a medium duty refractory mortar.

### Packaging Options

Part #	Description	Case Qty.
FP-10	10.3 oz. tube - Gray	12 Tubes
FP-8	8 oz cup - Gray	12 Cups
FP-32	32 oz. cup - Gray	12 Cups
FP-64	½ gallon pail - Gray	4 Buckets
FP-128	1 gallon pail - Gray	2 Buckets
FP-25	2 gallon pail - Gray	Each

### Specifications:

- Meets ASTM-C199
- Meets ASTM-E136
- PCE Value: 17-18
- Tested to 2700°F

### Features:

- Pre-mixed
- Smooth consistency
- Easy clean up
- Low V.O.C.'s





## **FOAM SEALANTS MAXIMUM RESULTS. MINIMAL EFFORT.**

**With the ever increasing importance of energy efficiency, Everkem offers a wide variety of insulating foam sealants and accessories to complement our Seal Tite line. Our foam products offer consistent quality, high yield, economical solutions for air infiltration and insulating. Recognized by AAMA, UL, and evaluated to meet ASTM standards, look no further for high quality, performance driven foam sealants and accessories.**

# FOAM SEALANTS



Everkem Diversified Products' Selection of Foam Sealants

# FLAMETECH-FB

## Fireblocking Foam Sealant

**Specifications:**

- UL classified fireblocking alternative
- Meets ASTM-E84 Class 1
- Flame Spread: 25
- Smoke Developed: 50

**Features:**

- Inhibits passage of flames, smoke and toxic gases
- Easy to use
- Reduces labor costs
- Adheres to almost all building materials
- Tack free in 10 minutes
- Water resistant
- Identifiable bright orange color

Flametech-FB is a straw dispensed, single component expanding polyurethane foam sealant that offers a long lasting thermal and moisture protective seal and acts as a barrier to draft and air infiltration, water and moisture, smoke, flame, heat transfer, dust, noise, rodents, and insects.

Flametech-FB has been specifically formulated to expand and fill the annular space around wires, vents, pipes, ducts, and other mechanical items that penetrate sill/top plates and similar openings in Type V non-rated 1 & 2 family residential construction. Check with the local authority having jurisdiction for approval prior to use.

**Packaging Options**

Part #	Description	Case Qty.
DP44242	12 oz. aerosol can - straw dispensed	12 Cans



# THERMAL SEAL

## All-In-One Fireblock / Insulating Foam Sealant

### Specifications:

- AAMA approved
- UL classified fireblocking alternative
- Meets ASTM-E84 Class 1
- Flame Spread: 25
- Smoke Developed: 50

### Features:

- All-in-one formulation maximizes number of applications
- Will not bow or distort window & door frames when properly installed
- Easy to use
- Reduces labor costs
- Adheres to almost all building materials
- Tack free in 10 minutes
- Water resistant

Thermal Seal is a single component, all-in-one expanding polyurethane foam sealant that offers a long lasting thermal and moisture protective seal. Adhering to most common building materials, Thermal Seal's all-in-one formula offers both fireblocking and general insulating solutions.

**Window & Door / Insulating Foam:** Thermal Seal is a low pressure expanding foam that is AAMA approved and proven not to distort or bow out window or door frames when installed properly.

**Fireblocking Foam:** Thermal Seal is a UL recognized alternative fireblocking material for use in Type V non-rated 1 & 2 family residential construction .

### Packaging Options

Part #	Description	Case Qty.
TS-GF24	24 oz. aerosol can - gun dispensed	12 Cans



ALL-IN-ONE

FOAM SEALANTS

## TYTAN FIRE BLOCK FOAM

### Fireblocking Foam Sealant

Tytan Fire Block Foam Sealant is a ready-to-use polyurethane expanding foam formulated for filling, insulating and sealing gaps, cracks and openings in the interior and exterior of buildings.

Tytan Fire Block Foam Sealant has been tested according to ASTM-E814 (modified), NFPA 268 and meets the requirements for fireblocking penetrations around wires, pipes, ducts, and other penetrating items in single family residential construction.

#### Packaging Options

Part #	Description	Case Qty.
TY5952	12 oz. aerosol can - straw dispensed	12 Cans
TY7633	24 oz aerosol can - gun dispensed	12 Cans

#### Specifications:

- UL Classified
- Tested to UL273
- Tested to ASTM-E814 (modified)

#### Features:

- Inhibits passage of fire through residential utility penetrations
- Excellent sealing against gas and smoke
- Easy to use
- Bright orange color for easy identification
- Durable airtight seal



## TYTAN WINDOW & DOOR FOAM

### Insulating Foam Sealant

Tytan Window & Door Foam is a gun dispensed, closed cell, minimal expansion foam which expands, bonds, and seals.

Tytan Foam is effective in stopping the passage of air, noise, water, dust, rodents, and insects. This aids in the increase of energy efficiency by stopping air exchange at windows, doors, wall intrusions, and sill plates.

#### Packaging Options

Part #	Description	Case Qty.
TY0793	24 oz. aerosol can - gun dispensed	12 Cans

#### Specifications:

- Exceeds AAMA 812 Requirements
- UL Classified

#### Features:

- Low pressure, low expansion formula fills gaps without warping
- Flexible after cure
- Durable airtight seal
- Bonds and seals to common construction materials
- High thermal insulation value



## TYTAN FILL ALL **Insulating Foam Sealant**

Tytan Fill All Insulating Foam is a ready-to-use polyurethane expanding straw dispensed foam formulated for filling, insulating and sealing gaps, cracks and openings in the interior and exterior of buildings.

The multi-purpose formula creates a durable, airtight and waterproof seal that stops air infiltration, provides high insulation value and saves time and energy.

### Packaging Options

Part #	Description	Case Qty.
TY0031	12 oz aerosol can - straw dispensed	12 Cans

### Specifications:

- No CFC's
- No R22's
- No HCFC's
- UL Classified

### Features:

- Economically insulates, fills, seals, and bonds
- Easy to use
- Durable airtight seal
- Bonds and seals to most popular construction materials
- Excellent for interior and exterior applications



TYTAN BRAND  
SEALANTS

FOAM SEALANTS

## TYTAN FOAM CLEANER **Polyurethane Foam Remover**

Tytan Foam Cleaner is designed to clean, protect and extend the working life of foam guns, can valves, and dispensing equipment.

Tytan Foam Cleaner is environmentally friendly formula is also designed to prepare surface applications to enhance adhesion, dissolve wet polyurethane foams and polyurethane adhesives before they cure.

### Packaging Options

Part #	Description	Case Qty.
TY0799	12 oz. aerosol can	12 Cans

### Features:

- Safe for PVC surfaces
- Excellent for cleaning and dissolving uncured polyurethane foam, sealants, and adhesives
- Essential for cleaning and maintenance of foam guns
- Prevents sealing of can valves between uses





## **HIGH POWERED PRODUCTS FOR A HIGH POWERED INDUSTRY ELECTRA KEM ELECTRICAL CHEMICALS**

**Most likely, many have never heard the term “electrical chemicals” and we do not mind being the first company to coin the phrase. In the electrical industry, anti-oxidant joint compound and wire pulling lubricant go hand in hand as essential components for the professional contractor.**





# ELECTRA KEM ELECTRICAL CHEMICALS



The Electra Kem Line Of Products

## EZ-PULL Wire Pulling Lubricant

EZ-Pull Wire Pulling Lubricant is a premium grade lubricating gel that reduces friction and limits surface tension, making difficult wire pulling applications quick and easy. EZ-Pull is compatible with all cable jackets and possesses excellent cling characteristics. EZ-Pull is non-corrosive and non-toxic.

### Packaging Options

Part #	Description	Case Qty.
EZ-Pull-32	32 oz. bottle - Clear	12 Bottles
EZ-Pull-1	1 gallon pail - Clear	4 Pails
EZ-Pull-5	5 gallon pail - Clear	Each
EZ-Pull-55	55 gallon drum - Clear	1 Drum

### Specifications:

- Manufactured to IEEE-12101-1996 performance standards
- Meets ASTM-D1693 Environmental Stress Cracking Standards

### Features:

- Neutral PH (6-8)
- Stable over 30°F to 120°F temp range
- Safe for all cable types
- Super lubricity for quick and easy pulling
- Will not clog or corrode conduit
- Low V.O.C.'s



## EZ-PULL COLD Cold Weather Wire Pulling Lubricant

EZ-Pull Cold Wire Pulling Lubricant is a premium grade lubricating gel specially formulated for cold weather wire pulling applications in temperatures as low as -20°F.

EZ-Pull Cold reduces friction making difficult wire pulls, even in cold weather, quick and easy. EZ-Pull Cold is compatible with all cable jackets, is non-corrosive, and non-toxic.

### Packaging Options

Part #	Description	Case Qty.
EZ-PullWG-32	12 oz. bottle - Red	12 bottles
EZ-PullWG-1	1 gallon pail - Red	4 pails
EZ-PullWG-5	5 gallon pail - Red	Each
EZ-PullWG-55	55 gallon drum - Red	Each

### Specifications:

- Manufactured to IEEE-12101-1996 performance standards
- Meets ASTM-D1693 Environmental Stress Cracking Standards

### Features:

- Low temperature performance (as low as -20°F)
- Safe for all cable types
- Super lubricity for quick and easy pulls
- Will not clog or corrode conduit
- Low V.O.C.'s



# ANTI-OX

## Anti-Oxidizing Compound

### Features:


- Seals out air & moisture to prevent aluminum oxidation
- Improves service life of aluminum connections
- Improves conductivity
- Produces cooler connection
- May be used as an anti-siezing compound
- Compatible with insulating materials
- Stays in place with no running or dripping
- Stable over a wide range of working temperatures

Anti-Ox is used for aluminum-to-aluminum and aluminum-to-copper wire connections, designed for preventing air and moisture from creating corrosion, preventing the formation of oxide film, and improving the overall conductivity and service life of the electrical connection.

Anti-Ox is stable over a wide range of temperatures and is non-melting at 500°F.

### Packaging Options

Part #	Description	Case Qty.
AO-4	4 oz. bottle	12 Bottles
AO-8	8 oz. bottle	12 Bottles
AO-1G	1 gallon pail	4 Pails
AO-5G	5 gallon pail	Each
AO-55	55 gallon drum	Each

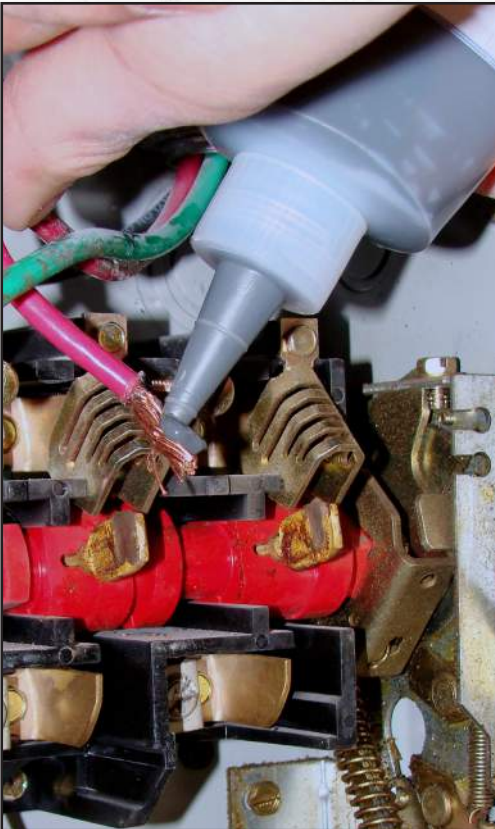



## **ITS IMPORTANT TO ALWAYS HAVE THE RIGHT TOOL FOR THE JOB.**

Choosing the right tools for the job is an important consideration when delivering on your promise of quality workmanship and timely service. We understand your need for professional grade tools and the accessories you depend on to get the job done.

# TOOLS & ACCESORIES



# CAULK GUNS Cartridge / Bulk / Sausage



10 oz. Economy Caulk Gun  
NB-DC012

10 oz. Economy Caulking Gun accomodates 10 ounce cartridges, and is designed to be a cost effective, yet reliable solution for virtually any use or caulking application.

**Features:**

- 3:1 thrust ratio
- Ladder hook
- Solid steel construction
- No drip

Part #	Description	Case Qty.
NB-DC012	10 oz. Economy Caulk Gun	12 Guns

10 oz. Skeleton Hex Rod Caulking Gun accomodates 10 oz. cartridges, and is designed with the professional in mind.

**Features:**

- 10:1 thrust ratio
- Seal puncture tool w/ spout cutter
- Ladder hook
- EZ load front cap
- Solid steel construction

Part #	Description	Case Qty.
NB-111	10 oz. Skeleton Hex Rod Caulk Gun	12 Guns



10 oz. Skeleton Hex Rod  
Caulk Gun  
NB-111

Bulk Caulking Gun accomodates quart size cartridges.



Bulk Caulk Gun  
NB-217D

**Features:**

- 6:1 thrust ratio
- Seal puncture tool w/ spout cutter
- Ladder hook
- Finger guard
- Solid steel construction


Part #	Description	Case Qty.
NB-217D	Bulk Caulking Gun - Quart	12 Guns

Professional grade manually operated gun to apply seam sealers, glues, and caulks & sealants packaged in sausage packs or cartridges.

**Features:**

- 18:1 thrust ratio
- Aluminum quick-screw ring
- Light weight (2.1 lbs.)

Part #	Description	Case Qty.
CCPS400	20 oz. Sausage Tube Gun	12 Guns

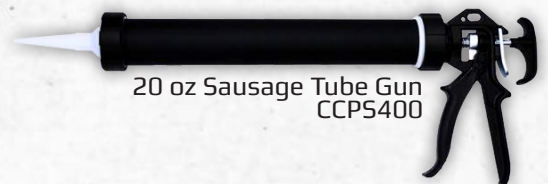

20 oz Sausage Tube Gun  
CCPS400

# FOAM GUNS

## Long Barrel / Performance / All Metal / Economy



Long Barrel Foam Gun  
CCFGB

The Long Barrel foam gun facilitates applications in excessively high or low areas (sub floors, insulation, etc.).

**Specifications:**

- 31 in. barrel length
- 36 in. total length
- 1.375 lbs total weight
- Teflon coated body and basket

**Features:**

- Long barrel to reach difficult areas.
- Adjustable product flow
- Ergonomic grip

Part #	Description	Case Qty.
CCFGB	Long Barrel Foam Gun	6 Guns

Combine with orders to meet minimum quantities. Prepaid freight w/ purchase of 6 guns.

The Ultra Foam Gun is our most advanced foam gun for heavy-duty use and is designed to exceed the requirements of the most demanding professional.

**Specifications:**

- 7 in. barrel length
- 13 in. total length
- 4.25 lbs. net weight
- Teflon coated body and basket

**Features:**

- Increased output
- Higher foam expansion
- Self cleaning needle
- Solvent resistant handgrip



Ultra Foam Gun  
CCFGU

Part #	Description	Case Qty.
CCFGU	Ultra Foam Gun	6 Guns

Combine with orders to meet minimum quantities. Prepaid freight w/ purchase of 6 guns.

The All-Metal foam gun is a professional, reusable gun for the price of a plastic gun.



All-Metal Foam Gun  
CCFGE

**Specifications:**

- 6 in. barrel length
- 11 in. total length
- 1.125 lb total weight

**Features:**

- Adjustable product flow
- Easy to use, reusable
- Individually tested

Part #	Description	Case Qty.
CCFGE	All Metal Foam Gun	6 Guns

Combine with orders to meet minimum quantities. Prepaid freight w/ purchase of 6 guns.

The economy foam gun allows for a labor-saving means of dispensing foam sealants.

**Specifications:**

- 7 in. barrel length
- 12 in. total length
- .6 lbs net weight

**Features:**

- Adjustable product flow
- Ergonomic grip
- 2x (200mm) extensions



Economy Foam Gun  
TY-463

Part #	Description	Case Qty.
TY-463	Economy Foam Gun	6 Guns

Combine with orders to meet minimum quantities. Prepaid freight w/ purchase of 6 guns.

## FASTENERS Hammer Tackers

The H30-6 hammer tacker drives staples from ¼" to ⅜" in length. A lightweight, well balanced, and durable design make the H30-6 hammer tacker ideal for high-volume applications and is excellent for insulation, plastic sheeting, Tyvek, and roofing paper.

Part #	Description	Case Qty.
SF-H30-6	H30-6 Hammer Tacker	6 Units

### Features:

- Die cast frame and hardened steel components for extreme durability
- Tool-free jam clearing
- Quick load magazine
- Comfort Grip



**Bostitch H30-6 Hammer Tacker**

The HT550C Equivalent Hammer Tacker is an excellent tool for insulation, roof paper, and house wrap. Designed for the professional; featuring quick jam clearing and durable construction for greater reliability. The HT-550 Equivalent has a rear loading magazine and two-strip load capacity.

Part #	Description	Case Qty.
SN-35000	HTT50C Equivalent Hammer Tacker	10 Units

### Features:

- Die cast frame and hardened steel components for extreme durability
- Tool-free jam clearing
- Quick load magazine
- Comfort Grip



**HTT50C Equivalent Hammer Tacker**

## FASTENERS Staples

Staples available in a wide array of sizes, finishes, and brands synonymous with fastening quality.

Part #	Description	Count	Case Qty.
SN82506	Spotnails H30-8 – 3/8" Galvanized	5000 Staples	20 Boxes
SN81504	Spotnails H30-6 – 1/4" Galvanized	5000 Staples	20 Boxes
SN81505	Spotnails H30-6 – 5/16" Galvanized	5000 Staples	20 Boxes
SN81506	Spotnails H30-6 – 3/8" Galvanized	5000 Staples	20 Boxes
SN84504	Spotnails R-19 – 1/4" Galvanized	5000 Staples	20 Boxes
SN35504	Duofast HT550C – 1/4" Galvanized	5000 Staples	20 Boxes
SN35505	Spotnails H3T550C – 5/16" Galvanized	5000 Staples	20 Boxes
SN35506	Spotnails H3T550C – 3/8" Galvanized	5000 Staples	20 Boxes
EP-E706	Empire 7 Series E706 – 1/4" Lacquer Finished	1000 Staples	20 Boxes
EP-E708	Empire 7 Series E708 – 5/16" Lacquer Finished	1000 Staples	20 Boxes
EP-E710	Empire 7 Series E710 – 3/8" Lacquer Finished	1000 Staples	20 Boxes
EP-E712	Empire 7 Series E712 – 1/2" Lacquer Finished	1000 Staples	20 Boxes
EP-E714	Empire 7 Series E714 – 9/16" Lacquer Finished	1000 Staples	20 Boxes



# CUTTING

## Batt Knives

Hyde® industrial batt knife blades are made of the highest quality chrome vanadium steel. Each blade is individually hardened, tempered, ground and honed, and are securely fastened to the handle with strong nickel plated ferrules.

Batt knife handles have smooth, hardwood handles provide a comfortable, yet secure grip.

### Features:

- Chrome vanadium steel blades
- Smooth hardwood handles increase grip and comfort
- Fastened with nickel plated ferrules



Part #	Description	Case Qty.
HYD60780	8" Square Point Batt Knife	4 Boxes

# CUTTING

## Utility Knives / Replacement Blades

Retractable utility knife with three blades.



Retractable utility knife replacement blades.



Part #	Description	Case Qty.
USB-117-52B	Retractable Utility Knife w/ 3 Replacement Blade - Red	20 knives

Part #	Description	Case Qty.
EP-RB100	Heavy Duty Razor Blades - 100	50 boxes



# ORDERING PRICING / TERMS SHIPPING

## ORDERING INFORMATION

---

**Hours Of Operation:** Office hours are Monday through Friday, 9:00 AM to 5:00 PM E.S.T.

**Ordering:** Same day shipping on all "in stock" items with orders placed before 3:00 PM E.S.T. Standard transit times do apply. Orders may be placed by the following methods:

**Order By Phone:** Contact your Everkem sales representative or customer service specialist at 1-800-638-3160 Monday through Friday, 9:00 AM to 5:00 PM E.S.T. To place an order after business hours please leave a detailed message in your account manager's voicemail box or our general voicemail box and your order will be confirmed via your representative's call, a fax confirmation, or e-mail the following business day.

**Fax Orders:** (336) 661-7969. All fax orders will be acknowledged verbally, via fax confirmation, or e-mail. If you do not receive confirmation in one of those ways, your order may not have been received and we kindly request you contact us at 1-800-638-3160 to ensure your order will be processed in a timely manner.

## PRICING / TERMS

---

**Prices:** All prices are subject to change without notice. We will make our best attempt at allowing a 30+ day advanced notice of any increase in price. Please contact your Everkem sales representative for current published pricing. All published prices are stated in minimum order quantities to obtain pre-paid freight. Price breaks may be allowed for greater quantities. Ordering a combination of different products can be used to achieve price breaks and pre-paid freight minimums. Please call 1-800-638-3160 for further price discounts.

**Terms:** Net 30 day terms with approved credit. Please contact us to receive a confidential credit application, or fax credit information to (336) 661-7969. A 2% monthly cumulative penalty fee will be added to all delinquent invoices greater than 30 days past due.

## SHIPPING

---

**Delivery / Freight:** All orders include free shipping with specified minimums within the continental limits of the United States. Shipping charges will apply to all orders requested for less than the specified minimum.

**Drop Shipments:** Please contact your Everkem sales representative to discuss details and options for drop ship requirements.



# WARRANTY AND DISCLAIMER

## WARRANTY

---

All Everkem manufactured products are warranted to be free from defect. Any such defective product will, at Everkem's discretion, be replaced free of charge including the freight arrangements. Our liability under all warranties, expressed or implied, shall be limited to the purchase price or replacement of defective product.

**Return Goods Policy:** For materials that hold a published shelf life, return authorization may be allowed provided the product is returned 4 months prior to the end of the published shelf-life date, be in full case quantities, and be in good resalable condition. Product that has gone beyond the published shelf-life date is not available for return. A Return Goods Authorization (RGA) must be issued from Everkem for all goods to be returned. A 20% restocking fee plus return freight charges will be deducted from customer's credit. Returned products will be inspected upon arrival for quantity returned, condition and packaging before credit will be issued. Returned Goods Policy does not extend to products that have been improperly used or altered by any entity other than Everkem Diversified Products.

**Freight Claims:** Responsibility for acceptance of all shipment lies with the receiving party. Everkem recommends a thorough count and inspection of shipment prior to freight bill signing to insure shipment accuracy and that the material received is in good condition. Claims on prepaid shipments must be made with Everkem customer service personnel within five (5) days of receipt of delivery. A copy of the original freight bill with the shortage or damage listed and signature of carrier is required. By signing the freight bill, the receiver accepts the delivery as complete, intact, and in good condition. Claims on collect shipments should be filed directly with the carrier by the receiver.

## PRODUCT SPECIFICATIONS

---

Dimensions, sizes, and weights listed for products in this catalog are nominal and are provided as a convenience for reference only as of the time of printing. No representations or warranties are made as to the dimensions and weights listed in the Everkem Product Catalog. They are subject to change without notice.



**5180 Indiana Avenue  
Winston-Salem, NC 27106**

**Ph: 1-800-638-3160  
Fx: (33) 661-79699**

**[www.everkemproducts.com](http://www.everkemproducts.com)**