

**LUBRICATION PRODUCTS & SOLUTIONS** 



# MOVE PRODUCTS FOR ANY ENVIRONMENT



## CONTENTS

**GREASE GUNS** 

**GREASE GUN ACCESSORIES** 15–21

**GREASE FITTINGS**22–25

PUMPS/SIPHONS 26-31

OILERS / ADHESIVE GUNS 32-33

FILTER WRENCHES
34-37

FUNNELS 38-41

MEASURES / FILLERS
42-45

LIFT DRAINS & ACCESSORIES
46-47

GREASE / OIL 48-57

PARTS INDEX 58-59

# LEVER GREASE GUNS

# 30-200 30-449

# STANDARD LEVER GREASE GUNS

Ideal for household and do-it-yourself automotive use. 2-way loading: 14 oz. cartridge or suction load. Includes 5-3/8" angled pipe and coupler. Develops up to 6,000 PSI. Delivers 1 oz./40 strokes.

**30-200** Boxed. 5/master

30-449 Polybagged. 10/master



An improvement of the 30-200, this gun has a textured barrel and rubber handle grip for added ease of use. 2-way loading: 14 oz. cartridge or suction load. Includes 5-3/8" angled pipe and coupler. Added bleeder valve and locking plunger provide for easier priming. Develops up to 6,000 PSI. Delivers 1 oz./40 strokes.

**30-203** Boxed, 5/master



# PROFESSIONAL LEVER GREASE GUNS

A step up from standard lever grease guns. Lightweight aluminum barrel and rubber handle make for easier use. 3-way loading: 14 oz. cartridge, bulk or suction. Includes 5-3/8" angled pipe, coupler and 12" flex hose. Added bleeder valve and locking plunger for easier priming. Develops up to 7,000 PSI. Delivers 1 oz./40 strokes.

**30-802** Boxed. 10/master

# INDUSTRIAL LEVER GREASE GUNS

Made for the punishing day-in and day-out service required by industrial customers. Variable/short stroke for easy use in confined areas. Dual port head cap with bulk loader fitting for 3-way loading: 14 oz. cartridge, bulk or suction. 5-3/8" pipe and coupler. Plated lever with comfortable oversized grip. Develops up to 10,000 PSI. Delivers 1 oz./22 strokes.

**30-465** Zinc plated barrel. Boxed. 5/master

30-475 Painted barrel. Boxed. 5/master

# **EXTREME DUTY**LEVER GREASE GUNS

Ultimate® Grease Gun equipped with 10" grease pipe, HD coupler, longer lever, barrel and lever-comfort grips, air bleeder valve, bulk loader fitting, variable/ short stroke and 3-way loading: 14 oz. cartridge, bulk or suction. Develops up to 10,000 PSI. Delivers 1 oz./12 strokes. Built to take extreme punishment.

**30-480** Boxed 5/master

The Dual Piston Grease Gun provides the best of both worlds. High pressure output needed for dirty, blocked fittings easily switches to high volume to get the job done faster. 3-way loading: 14 oz. cartridge, bulk or suction. Includes 5-3/8" angled pipe with HD coupler, and 18" flex hose with HD coupler. Dual purpose bulk loader/bleeder fitting makes priming easier. The lightweight aluminum barrel and rubber

handle grip make for more comfortable use.
Develops up to 10,000 PSI. Delivers 1
oz./12 strokes.

30-804 Boxed. 5/master



30-480

30-804

# PISTOL GREASE GUNS



# STANDARD PISTOL GREASE GUNS

Easy one handed operation. 2 way loading: 14 oz. cartridge or suction load. Head cap port for adding air bleeder or bulk loader fitting. Equipped with 5-1/2" grease pipe and coupler. Develops up to 6,000 PSI. Delivers 1 oz./40 strokes.

**30-300** Boxed. 5/master

30-310 Includes 12" Flex Hose. Boxed. 3/master



30-310

A cut above the 30-300, this gun adds a textured barrel and rubberized grip for ease of use and comfort. 2-way loading: 14 oz. cartridge or suction load. The added bleeder valve and locking plunger provide for easier priming. Equipped with 5-1/2" grease pipe and coupler. Develops up to 6,000 PSI. Delivers 1 oz./40 strokes.

**30-303** Boxed. 5/master



# PROFESSIONAL PISTOL GREASE GUNS

Features variable stroke for use in tight places. 3-way loading: 14 oz. cartridge, bulk or suction. Includes 18" flex hose with coupler, vinyl handle grip, air bleeder, and bulk loader fitting. Develops up to 7,000 PSI. Delivers 1 oz./40 strokes.

**30-416** Boxed. 5/master

# AIR OPERATED PISTOL GREASE GUN

Continuously pumps grease while trigger is depressed. 2-way loading: 14 oz. cartridge or suction load. Includes 5-3/8" pipe and coupler. Develops up to 3,600 PSI. Delivers 5 oz. per minute.

**30-114** Boxed. 10/master



## BATTERY OPERATED

## **GREASE GUN**

## 12 VOLT BATTERY GREASE GUN KIT

12-Volt NiCad Battery Operated Grease Gun Kit. Includes storage case, 1 hour quick charger, 30" flex hose, heavy duty coupler, and bleeder valve. 2-way loading: 14 oz. cartridge or suction load. Develops up to 7,700 PSI, delivers 2 oz. of grease per minute (4-6 tubes of grease per charge).

**30-601** Storage Case. 1/master



## 12V BATTERY REPLACEMENT

**30-602** 12V Battery replacement for 30-601. Boxed. 2/master

## 12V CHARGER REPLACEMENT

**30-603** Charger replacement (not shown). Boxed. 1/master

#### BARREL/PLUNGER REPLACEMENT

**30-613** Replacement Barrel/Plunger (not shown). Boxed. 1/master



ß

# MINI GREASE GUNS

## **ECONOMY**

## MINI GREASE GUNS

A compact "tool box" size grease gun perfect for hard to reach jobs. Barrel takes 3 oz. grease cartridge. Includes 4" straight pipe and coupler. Develops up to 3,500 PSI. Delivers 0.5 oz./40 strokes.

**30-132** With LubriMatic® Multi-Purpose Lithium Grease. Display Pack. Clamshell. 10/master

**30-132-07** Gun Only. Bulk. 20/box



## **GENERAL PURPOSE**

## MINI GREASE GUNS

Small, versatile grease gun. Allows for front and top pipe placement. Pistol grip for easy one-handed use, and locking plunger for easy priming. Includes 4-1/2" straight pipe and coupler.

**30-100** 2-way loading: 3 oz. cartridge or suction load. Develops up to 3,500 PSI. Delivers 0.5 oz./40 strokes. Clamshell. Display pack. 4/master

**30-193** 2-way loading: 3 oz. cartridge or suction load. Develops up to 4,400 PSI. Delivers 0.5 oz./40 strokes. Bulk. 25/box

**30-192** 2-way loading: 3 oz. cartridge or suction load. Includes LubriMatic® Corrosion Control Trailer Wheel Bearing Grease. Develops up to 4,400 PSI. Delivers 0.5 oz./40 strokes. Clamshell. 10/master

**30-190** 2-way loading: 3 oz. cartridge or suction load. Includes LubriMatic® Multi-Purpose Lithium Grease. Develops up to 4,400 PSI. Delivers 0.5 oz./40 strokes. Clamshell. 10/master



**HEAVY DUTY** 

MINI GREASE GUN









## QUICK RELEASE GREASE GUNS



The SnapLock® grease guns innovate the grease gun world with a patented "threadless" barrel and locking mechanism to secure the barrel in place. The aluminum barrels are lightweight to reduce fatigue during use. 3-way loading: 14 oz. cartridge, bulk or suction. An auto-bleeder valve and locking plunger make priming simple. Variable stroke for use in tight spaces. Best in class in the grease gun market.


## **LEVER GREASE GUN**

Includes 5-1/2" angled pipe, 18" flex hose and heavy duty coupler. Develops up to 10,000 PSI with pressure release valve. Delivers 1 oz./27 strokes.


**30-806** Boxed, 5/master

#### **PISTOL GREASE GUN**

Includes 5-1/2" straight pipe, 18" flex hose and heavy duty coupler. Develops up to 8,000

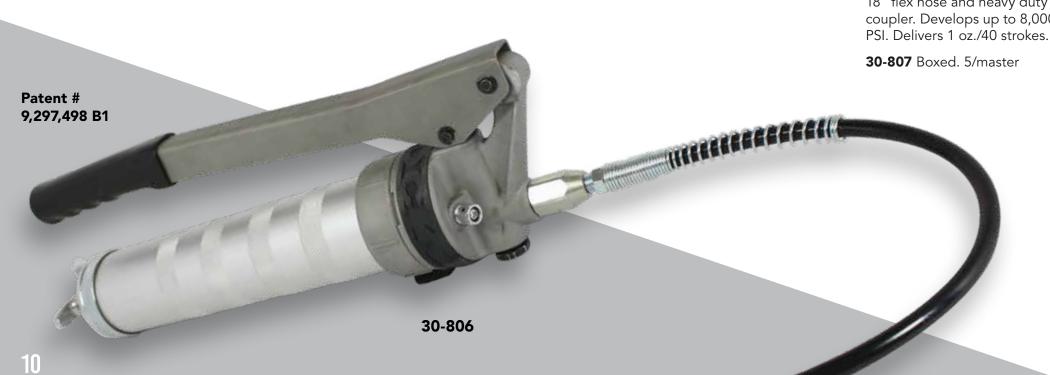



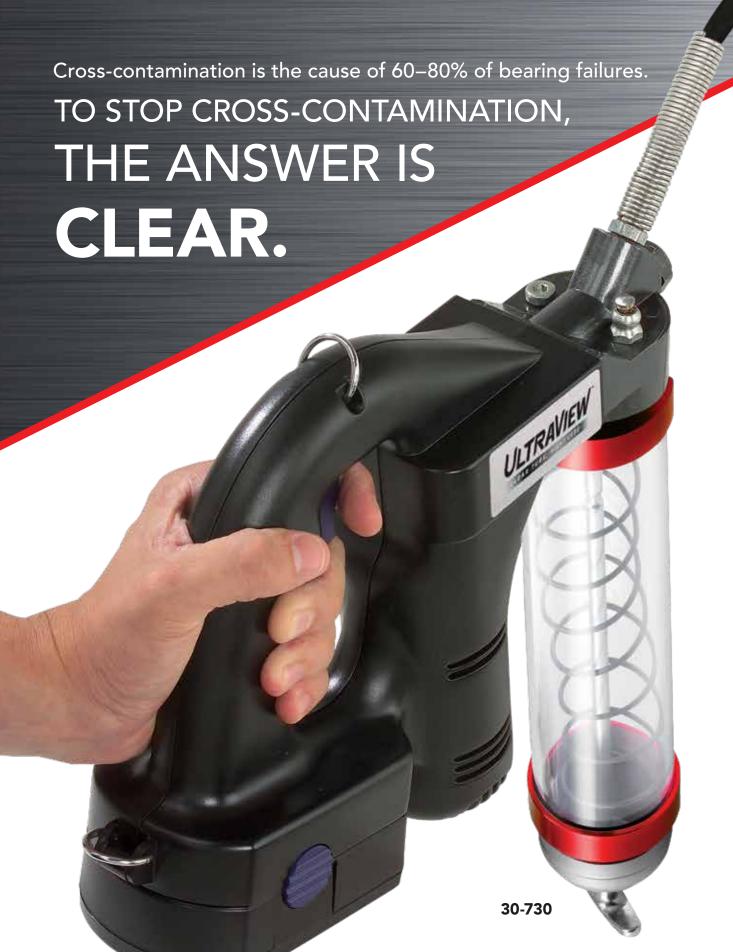

# ULTRAVIEW®

CLEAR TUBE, RIGHT LUBE®

## **CLEAR GREASE GUNS**

#### **BATTERY OPERATED GREASE GUN**

2-way loading: 14 oz. cartridge or suction. Equipped with two 18-Volt NiCad batteries, 1 hour quick charger, 42" flex hose, coupler, carrying strap and storage case. Develops up to 7,500 PSI. Delivers 1 oz./40 strokes.

30-730 Storage Case. 1/master

#### **LEVER GREASE GUN**

3-way loading: 14 oz. cartridge, bulk or suction. Equipped with 5-1/2" pipe, 12" flex hose and coupler. Develops up to 10,000 PSI. Delivers 1 oz./27 strokes.

**30-700 (Red), 30-701 (Green)** Boxed. 5/master

#### PISTOL GREASE GUN

3-way loading: 14 oz. cartridge, bulk or suction. Equipped with 5-1/2" pipe, 12" flex hose and coupler. Develops up to 7,000 PSI. Delivers 1 oz./40 strokes.

**30-720 (Red), 30-721 (Green)** Boxed. 5/master

#### SUCTION GUN

Visually see inside to determine amount of dirt or impurities in system. 16 oz. capacity. 12" clear hose. 9-3/4" stroke.

**30-740 (Red), 30-741 (Green)** Boxed. 5/master

#### **ULTRAVIEW® CLEAR TUBES**

Fits 2.280-16 UNS non-standard threads.

- Alemite 500, 590, 525
- Lincoln 1132, 1133, 1134 (new models), 1142, 1145, 1147, 1148
- Zee Line 444, 610, 613, 619, 620, HD4, HD4A Available in four colors for your grease gun.

30-750 (Red), 30-751 (Green), 30-753 (Black), 30-754 (Blue)

Boxed. 1/master

#### LUBE POINT POSITIVE ID SYSTEM (LPPID)

LPPID is a patent-pending color coordinating system that matches the Zerk fitting to the color of the UltraView® clear grease gun tube. 2 sizes available, 4 colors each (part numbers below). 25 per bag.

Fits 1/4" -28 grease fittings	30-760	30-761	30-763	30-764
Fits 1/8" NPT grease fittings	30-770	30-771	30-773	30-774





## MISCELLANEOUS GREASE GUNS



#### JIFFY LUBER W/PUSH TYPE ADAPTER

Designed for quick grease jobs. Squeeze tubes (not included) fit into the zinc die-cast body for easy dispensing. Includes 2-11/16" pipe.

**30-195** Carded. 10/master



#### **HANDI-GRIP PISTOL LUBER®**

All-purpose gun attaches to squeeze tubes of grease (not included). Includes spring-returned plated steel lever, zinc die-cast body, riveted plated steel link, 5-1/2" flex hose, and standard duty coupler.

**30-197** Carded. 10/master **30-197-07** Bulk. 25/box



#### **SUCTION GUN**

Designed for draining and filling non-corrosive liquids. Barrel holds approximately one pint with 9" stroke. Features 12" plastic hose and durable corrosion-resistant finish.

**30-118** Boxed. 10/master

## **GREASE GUN HOSES & PIPES**



## STANDARD DUTY FLEXIBLE GREASE HOSES

For use on hand operated grease guns only. 1/8" NPT male fittings on each end. Recommended working pressure is 4,000 PSI.

**10-200** 12" Length. Carded. 10/master

**10-201** 18" Length. Carded. 10/master



#### **HEAVY DUTY FLEXIBLE GREASE HOSES**

For use on hand operated grease guns only. Steel 1/8" NPT male fittings on each end. Recommended working pressure is 5,000 PSI.

10-212 12" Length. Carded. 10/master

**10-214** 12" Length. Bulk. 10/box

**10-218** 18" Length. Bulk. 10/box

**10-219** 18" Length. Carded. 5/master

**30-111-07** 6" Length. Bulk. 200/box



## FLEXIBLE GREASE HOSES FOR AIR OPERATED EQUIPMENT

Heavy duty, nylon braided, high quality thermoplastic grease hose with bend restrictor for air operated systems, 1/8" NPT male fittings on each end. Recommended working pressure is 6,000 PSI.

**10-512** 12" Length. Carded. 5/master

**10-514** 18" Length. Carded. 10/master

**10-536** 36" Length. Carded. 12/master



## 5-3/8" CURVED GREASE PIPE

Standard length pipe with 1/8" pipe thread on each end. 30° angle. Recommend working pressure is 8,000 PSI.

**05-061** Carded. 10/master

# **COUPLERS**

## **QUICK CONNECT**

**LOCKING COUPLER** 



The quick connect coupler easily attaches and disconnects from fittings with one simple motion. The coupler conveniently swivels 360° for access to any fitting location. Solid steel construction allows the coupler to build up to 8,000 PSI and still disconnect with ease. 1/8" NPT.



## **STANDARD DUTY COUPLER**

Standard jaw-type coupler feature spring-loaded ball check valve. Fits 1/8" NPT threads. For hand operated lube equipment only. Recommended working pressure is 4,500 PSI.

**05-031** Carded. 10/master

**05-031-2** 2 Pack. Carded 10/master

**05-031-6** 6 Pack. Carded. 10/master

**05-028** Bulk. 10/box

**05-030** Bulk. 100/box



#### **HEAVY DUTY COUPLER**

All steel construction for increased pressures. For hand operated grease guns only. Recommended working pressure is 6,000 PSI. Fits 1/8" NPT threads.

**05-035** Carded. 10/master

**05-034** Bulk. 10/box





#### **EXTREME DUTY COUPLER**

Designed for use with air powered equipment as well as hand guns. Heavy duty construction withstands higher pressures. Recommended working pressure is 8,000 PSI. Fits 1/8" NPT threads.

**05-036** Carded. 10/master

**05-038** Bulk. 25/box



## 90° GREASE COUPLER ADAPTER

For hard-to-reach grease fittings on cars, trucks and other equipment. Ideal for lubrication of front wheel drive vehicles. Complete with both small and large sleeves to fit all standard couplers. For hand operated grease guns only. Recommended working pressure is 4,500 PSI.

**05-059** Carded. 10/master



## RIGHT ANGLE COUPLER

Designed for hard-to-reach grease fittings, this 90° coupler with hex head greases fittings in confined spaces. 1/8" NPT female inlet. Recommended working pressure is 1,000 PSI.

**05-058** Carded. 10/master



Designed to lock at any angle up to 180°. Spring-loaded sleeve locks coupler in place for straight applications or slides back for angular application. Has an 8" overall length and corrosion-resistant finish. For hand operated grease guns only. 1/8" NPT male inlet. Recommended working pressure is 3,000 PSI.

**05-050** Carded. 10/master



#### 360° SWIVEL COUPLER

Swivels in a full 360° circle and locks in place. 45° angle gives easy access to most grease fittings. Comes with standard grease coupler and 1/8" NPT female inlet for extension pipe. For hand operated grease guns only. Recommended working pressure is 4,500 PSI.

**05-057** Carded, 5/master



## 360° HEAVY DUTY SWIVEL COUPLER

For use with air operated equipment. Swivels in full 360° circle and locks in place. 45° angle gives easy access to most grease fittings. 1/8" NPT female inlet. Recommend working pressure is 6,500 PSI.

**05-052** Carded. 5/master



#### **BUTTON HEAD FITTING COUPLER**

Specially designed for button head grease fittings. 1/8" NPT female inlet. Zinc-plated steel.

**05-048** Carded. 5/master For 5/8" button head fittings

**05-049** Carded. 5/master For 7/8" button head fittings

## GREASE GUN ACCESSORY KITS

Commonly needed accessories all in one reusable case. Kit includes 6" flexible whip hose, standard grease coupler, bleeder valve, rubber seal-off dispenser, grease injector needle, needle nose dispenser and grease coupler cap.

## **7 PIECE ACCESSORY KIT**

**05-060** Reusable box. Display Pack. 6/master

## **INCLUDES**

- 6" Flex Hose
- Seal-Off Dispenser
- Grease Gun Coupler
- Air Bleeder Valve
- Needle Nose Dispenser
- Injector Needle
- Grease Gun Coupler Cap



#### 27 PIECE ACCESSORY KIT

**05-065** Includes 20 assorted fittings. Reusable Box. Display Pack. 6/master

#### **INCLUDES**

- 6" Flex Hose
- Seal-Off Dispenser
- Grease Gun Coupler
- Air Bleeder Valve
- Needle Nose Dispenser
- Injector Needle
- Grease Gun Coupler Cap
- 20 Assorted Grease Fittings (1/4" x 28, 1/8 NPT and 6 mm)

## **GREASE GUN ACCESSORIES**

## **GREASE GUN HOLDER**

Designed for wall mounting with 2 screws (not included). Center latch locks. Corrosion-resistant finish.

**70-901** Carded. 5/master

**70-902** Bulk. 25/box





#### **GREASE GUN BRACKET**

High tension spring and durable steel plate hold grease guns securely in place. Corrosion resistant finish.

**70-904** Bulk. 2/box

## **GREASE GUN ACCESSORIES**



#### **GREASE INJECTOR NEEDLE**

Lubricates in very tight places such as universal joints and sealed bearings. Tempered steel 18 gauge x 1-1/2" long needle. Equipped with standard grease fitting and protective plastic cover. For hand operated grease guns only.

**05-037** Carded. 10/master



#### **PUSH TYPE ADAPTER**

For hard to reach fittings on cars, trucks, and other equipment. Equipped with a slide on locking sleeve, it quickly connects to any standard coupler. Simple push engagement with fittings makes for quick use.

**05-021** Carded. 10/master



#### **SEAL-OFF DISPENSER**

Use for lubricating cars with grease plugs. Oil and grease resistant rubber tip. 1/8" NPT female inlet. For hand operated grease guns only.

**05-041** Carded. 10/master



#### **NEEDLE TIP ADAPTER**

For chain saws, universal joints, bicycles, etc. For hand operated grease guns only.

**05-042** Carded. 10/master



## DAPTER 1/2" NEEDLE NOSE DISPENSER

Dispenses a fine line of grease. .55" needle length. .046" tip diameter and .20" body diameter. For hand operated grease guns only. 1/8" NPT female.

**05-045** Carded. 10/master



#### **BEARING PACKERS**

For use with either hand operated or power lube equipment. Threaded center post for positive locking of wheel bearing.

**70-025** Steel. 1/2" to 5" OD, 2" height bearings. Carded. 5/master

**70-026** Plastic. 1/2" to 4-1/4" OD, 2" height bearings.
Carded, 3/master

## **GREASE GUN ACCESSORIES**



#### 1.5" NEEDLE NOSE DISPENSER

Hardened steel tip and 1-1/2" length dispenses a fine line of grease. Ideal for hard-to-reach jobs. .046" tip diameter and .16" body diameter. For hand operated grease guns only. 1/8" NPT female.

**05-019** Carded. 10/master





#### 4" NEEDLE NOSE ADAPTER

Perfect for use on trucks, vans and RVs. For converting jaw-type lube couplers to steel needle points. Dispenses fine line of grease. Includes both small and large sleeves to fit all standard couplers. Overall length 7-1/8", tip diameter .046", body diameter .250" For hand operated grease guns only.

**05-025** Carded, 10/master



## **AIR BLEEDER VALVE**

Quickly vents air pockets in grease guns. Zinc-plated, easy to use. 1/8" NPT male fitting.

**05-039** Carded, 10/master



#### **GREASE GUN LOADER FITTINGS**

Use in grease gun heads for bulk loading. Zinc-plated. 1/8" NPT male fitting.

**05-047** Carded, 10/master

## **GREASE FITTING TOOLS**



#### LARGE 4-WAY GREASE FITTING TOOL

Designed for 1/8" NPT fittings. Tap repairs 1/8" NPT threads. Wrench removes 7/16" and 3/8" hex fittings and plugs. Wrench installs new fittings. 1/8" NPT "easy-out" removes broken fittings.

**11-904** Carded. 5/master

**11-902** Bulk. 25/box



#### **SMALL 4-WAY GREASE FITTING TOOL**

Designed for 1/4"-28 and 6mm fittings. Tap repairs 1/4"-28 threads. Wrench removes 5/16" and 3/8" hex fittings and plugs. Wrench installs new fittings. 1/4"-28 "easy-out" removes broken fittings.

**11-903** Carded. 10/master



#### STRAIGHT DRIVE GREASE FITTING TOOL

For straight drive-in fittings; 4-1/2" long, 11/16" diameter.

**11-912** Carded. 5/master



## **IMPACT FITTING CLEANER**

Simple to use cleaner for dirty, blocked grease fittings. Includes 6" flexible hose for hard to reach fittings.

**11-917** Storage Case. 3/master

## **GREASE FITTINGS**



#### STANDARD GREASE FITTING ASSORTMENT - 8 PIECE

1/4"-28 standard fittings on blister card. Includes 4 straight, 2 at 45° angle and 2 at 90° angle.

**11-955** Carded. 10/master



#### **METRIC GREASE FITTING ASSORTMENT – 8 PIECE**

6mm x 1 metric fittings on blister card. Includes 4 straight, 2 at 45° angle and 2 at 90° angle

**11-957** Carded. 10/master



#### STANDARD GREASE FITTING ASSORTMENT – 25 PIECE

1/4"-28 grease fittings packed in a transparent box. Includes 10 short, straight, 6 short at 45° angle, 4 long at 45° angle, and 5 short at 90° angle.

**11-962** Boxed. 10/master



#### **METRIC GREASE FITTING ASSORTMENT - 25 PIECE**

6mm x 1 metric grease fittings packed in a transparent box. Includes 10 short, straight, 8 short at 45° angle, and 7 short at 90° angle.

**11-963** Boxed. 10/master

## **GREASE FITTINGS**



#### STANDARD GREASE FITTING ASSORTMENT - 50 PIECE

1/4"-28 grease fittings packed in transparent box. Includes 25 short straight, 5 long straight. 10 at 45° angle and 10 at 90° angle.

**11-951** Boxed. 10/master



#### PIPE THREAD GREASE FITTING ASSORTMENT - 50 PIECE

1/8" NPT grease fittings, packed in transparent box. Includes 30 straight, 10 at 45° angle and 10 at 90° angle.

11-954 Boxed, 10/master



#### **DELUXE GREASE FITTING ASSORTMENT - 100 PIECE**

1/8" NPT and 1/4"-28 grease fittings packed in transparent box. 1/8" NPT fittings include 30 straight, 2 at 30° angle, 5 at 45° angle, 5 at 65° angle and 3 at 90° angle. 1/4"-28 fittings include 40 straight, 10 at 45° angle and 5 at 90° angle.

**11-953** Boxed. 1/master




## 100 PIECE METRIC GREASE FITTING KIT

6mm, 8mm, and 10mm grease fittings packed in transparent box. 6mm fittings include 40 straight, 6 at 45° angle, and 6 at 90° angle. 8mm fittings include 12 straight, 6 at 45° angle, and 6 at 90° angle. 10mm fittings include 12 straight, 6 at 45° angle, and 6 at 90° angle.

**11-956** Boxed. 10/master

# SIZES & SPECIFICATIONS

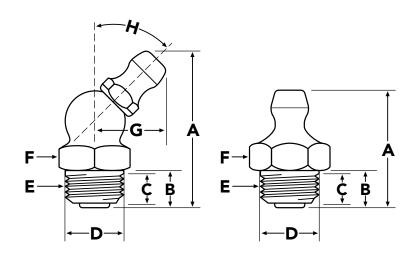

5 PACK	10 PACK	BOX 50	BOX 100	BOX 1000	DESCRIPTION	A	В	С	D	E	F	G	н
SAE FITT	INGS												
-	11-151	-	11-150	-	1/8" NPT STRAIGHT, SHORT	21/32	9/32	3/16	13/32	1/8 NPT	7/16	-	-
11-159	-	-	11-218	-	1/8" NPT 45° ANGLE	55/64	19/64	7/32	13/32	1/8 NPT	7/16	29/64	45°
11-167	-	11-166	-	-	1/8" NPT 90° ANGLE	27/32	19/64	7/32	13/32	1/8 NPT	7/16	1/2	90°
11-201	-	-	11-226	-	1/4" NPT STRAIGHT	7/8	27/64	5/16	17/32	1/4 NPT	9/16	-	-
-	11-101	-	11-100	11-103	1/4"-28 STRAIGHT, SHORT	35/64	3/16	7/64	1/4	1/4-28 SAE-LT	5/16	-	-
-	11-105	-	11-104	-	1/4"-28 45° ANGLE	13/16	13/64	9/64	1/4	1/4-28 SAE-LT	3/8	13/32	45°
-	11-113	11-112	-	-	1/4"-28 90° ANGLE	3/4	13/64	5/32	1/4	1/4-28 SAE-LT	3/8	1/2	90°
METRIC F	ITTINGS												
11-301	-	-	-	-	6 MM – 1.0 METRIC STRAIGHT	39/64	15/64	5/32	15/64	6 MM-1P	7 MM	-	-
11-305	-	-	-	-	6 MM – 1.0 METRIC 90° ANGLE	47/64	13/64	5/32	15/64	6 MM-1P	9 MM	1/2	90°
11-311	-	-	-	-	8 MM – 1.0 METRIC STRAIGHT	21/32	15/64	5/32	5/16	8 MM-1P	9 MM	-	-
11-313	-	-	-	-	8 MM – 1.0 METRIC 45° ANGLE	59/64	13/64	5/32	5/16	8 MM-1P	9 MM	13/32	45°
11-315F	-	-	-	-	8 MM – 1.0 METRIC 90° ANGLE	23/32	13/64	5/32	5/16	8 MM-1P	9 MM	1/2	90°
11-321	-	-	-	-	10 MM – 1.0 METRIC STRAIGHT	21/32	15/64	5/32	25/64	10 MM-1P	11 MM	-	-
THREAD I	FORMING FI	TTINGS											
-	-	-	-	11-432	1/4"-28 SPECIAL TAPER DRIVE	17/32	13/64	1/8	1/4	1/4-28	5/16	-	-
DRIVE FIT	TTINGS												
-	11-447	-	-	11-448	1/4" STRAIGHT DRIVE	35/64	1/4	-	1/4	-	11/32	-	-
-	11-438	-	-	-	3/16" STRAIGHT DRIVE	17/32	1/4	-	3/16	-	5/16	-	-
-	11-453	-	-	-	5/16" STRAIGHT DRIVE	35/64	1/4	-	5/16	-	3/8	-	-

# PUMPS & SIPHONS

## **BOTTLE PUMPS & ADAPTER FITTING**




4cc pump for adding oil and other fluids to small engines and marine lower units. Flexible hose for hard-to-reach fill plugs. Intended for quart sized bottles.

55-001 Clamshell. 12/master

**55-005** 3/8"-16 swivel metal marine filler fitting. Clamshell. 6/master

**55-007** 3/8"-16 plastic marine filler fitting. Clamshell. 12/master



#### SIPHON HOSE

Multi-purpose all rubber siphon hose. 6' length. Rubber bulb makes it easy to start flow of liquid. Ideal for home, garden, boat, shop or garage. Transfers, drains or pumps all types of liquid including gasoline.

**75-847** Bagged. 10/master



## FLUID LUBRICANT PUMPS



## LEVER ACTION DISPENSER

For transfer of transmission, differential and heavier fluids. Self priming. Delivers 3 oz. per stoke. Complete with 4 ft. oil-resistant hose and drum pail cover. Fits open head pails/drums.

**55-440** For 5 gallon/35 lb. pail. Boxed. 1/master

**55-441** For 16 gallon/120 lb. pail. Boxed. 1/master



#### MARINE LOWER UNIT PAIL PUMP

For bulk filling of marine lower units and stern drives. Delivers 3 oz. per stoke. Complete with threaded fitting for domestic standard lower units. Fill adapter for other engines available (see 55-012, page 26). Fits 5 gallon/35 lb. pail.

**55-011** Boxed. 1/master



#### **BEARING PACKER GREASE PUMP**

Hand operated, portable bearing packer. Ideal for packing several bearings in a short amount of time. For all car, boat, trailer and RV bearings having a minimum ID of 1/2" to a maximum OD of 5". Height of 1/4" to 2". Rugged steel construction. Fits 35–50 lb./5 gallon plastic pails. Includes follower plate.

**55-107** Boxed. 1/master



#### **GREASE GUN FILLER PUMP**

Includes filler adapter for LubriMatic® bulk loader fittings. Equipped with follower plate, pail cover and filler adapter cap to prevent grease contamination. Fits 35-50 lb./5 gallon pails.

**55-117** Boxed. 1/master

## TRANSFER PUMPS



#### MULTI-PURPOSE TRANSFER PUMP

The multi-use fluid transfer pump is a versatile pump for liquid transfer and air inflation. Ideal for siphoning gas or changing oil. May also double as an inflator for sports balls, air mattresses, and small tires. Pump includes two 50" liquid transfer hoses, 16" air hose, and the necessary nozzles and accessories.

75-846 Clamshell. 6/master



#### HAND TRANSFER PUMP

Ideal for transfer from one container to another, also for draining oils and other fluids. Hand operated, self-priming. Great for farm, home, automotive and factory use. Heavy duty steel construction. 8 ft. tubes (.50" ID x .63" OD) for suction and discharge of fluids up to 90 wt. Double check valve. Approximately 1 gallon per 8 strokes.

**30-108** Boxed. 6/master

## **ROTARY BARREL PUMPS**



## STANDARD ROTARY BARREL PUMP

For transferring non-corrosive petroleum-based fluids of light to medium viscosity. For industrial, commercial, automotive and agricultural applications. Single direction 2-vane pump with rugged cast iron housing and 42" steel suction pipe. Spout OD 1-1/16".

**55-303** Boxed. 1/master

**NYLON BARREL PUMP** 

**55-019** Fits 30-55 gallon

drums. Boxed. 10/master

## **PULL-UP BARREL PUMPS**

## STEEL BARREL PUMP

**55-017** Fits 30-55 gallon drums. Boxed. 1/master





**5-GALLON PAIL PUMP 55-141** Boxed. 3/master



## LEVER OPERATED BARREL PUMPS

55-123

55-124 55-125



#### **HEAVY DUTY BARREL PUMP**

2-piece telescoping suction tube fits 30–55 gallon drums. Dispenses approximately 10 oz. per stroke. Standard bung adapter, all steel foot valve and piston valve. Spout OD 3/4". Standard garden hose thread discharge spout.

**55-123** Boxed. 1/master

## PROFESSIONAL BARREL PUMP

Lever style barrel pump with non-drip sprout. Equipped with brass rings and floating piston design. Self-adjusting telescopic suction tube. Designed to pump all lubrication-based fluids, antifreeze, agricultural and industrial non-corrosive fluids. Dispenses approximately 12 oz. per stroke. Fits 30–55 gallon drum.

**55-124** With standard lever handle. Boxed. 1/master

**55-125** With multi-directional handle. Boxed. 1/master

## PLASTIC BARREL PUMPS



## **ROTARY BARREL PUMP**

Fits 5–55 gallon drums. Heavy duty chemical resistant construction and seals enable this pump to be used with DEF, fuel, water base and acidic solutions. Delivers 6 gallons per 100 revolutions. Spout OD 1-1/16".

**55-155** Boxed. 4/master



#### **LEVER BARREL PUMP**

Fits 5–55 gallon drums. Heavy duty chemical resistant construction and seal enable these pumps to be used with DEF fuel, water base and acidic solutions. Self-adjusting telescopic suction tube. Delivers 9 oz. per stroke. Spout OD 7/8".

**55-156** Boxed. 4/master

## **PUMPS & SIPHONS**

## PUMP APPLICATION CHART

ITEM NO.	ТҮРЕ	MATERIAL TO BE PUMPED	MATERIAL NOT TO BE PUMPED			
30-108	HAND HELD TRANSFER PUMP STYLE STEEL CONSTRUCTION & VINYL HOSE	OIL-BASED FLUIDS	WATER-BASED FLUIDS, SOLVENTS, WEAK Acids, antifreeze, gasoline*/ diesel Fuel			
55-001						
55-005	BOTTLE. PUSH PUMP STYLE	OIL-BASED FLUIDS	GASOLINE, DIESEL, ACIDS OR BASES			
55-007	501122,1001110111011122	012 511025 120150	ondoline, bledet, noibe on bhold			
55-012						
55-017	ROD STYLE Steel Piston / Valves No Rubber Packing or Sleeves	OIL-BASED FLUIDS	WATER-BASED FLUIDS, WEAK ACIDS, Antifreeze, Gasoline*/ Diesel fuel			
55-019	ROD STYLE Stainless Steel Piston	ACETATES, AMMONIA, BENZENE, KETONES, LACQUERS, LACQUER SOLVENTS, DEF, METHANOL, TOLUENE AND THINNERS, GASOLINE. DIESEL, AND SOME ACIDS	BLEACH, CITRIC ACID, CHLORINE, SODIUM CHLORIDE, HYDROCHLORIC ACID. SEE CHEMICAL COMPATIBILITY CHART			
55-123		OIL-BASED FLUIDS				
55-124		ANTIFREEZE	WATER-BASED FLUIDS, SOLVENTS,			
55-125	STEEL PISTON/BRASS RINGS	WINDSHIELD WASHER FLUID	WEAK ACIDS, GASOLINE*/ DIESEL FUEL			
55-155		ACIDS, ALKALINES, GASOLINE, D.E.F., Diesel, Machine Oil, Water, Alcohol, Thinners and Petroleum-Based Products				
55-156	LEVER BARREL STYLE Chemically resistant materials	WATER, ALCOHOL, GASOLINE, D.E.F, DIESEL, KEROSENE & PETROLEUM- BASED PRODUCTS, WATER, WATER-BASED CHEMICALS, ALCOHOL, KEROSENE, GASOLINE, DIESEL, PETROLEUM-BASED PRODUCTS, MILD ACID AND MILD ALKALI SOLUTIONS				
55-200	DIAPHRAGM STYLE Push/Pull Lever	OIL-BASED FLUIDS, LIKE HEATING OIL And other Petroleum Products Gasoline*/Diesel Fuel	WATER-BASED FLUIDS, SOLVENTS, WEAK ACIDS			
55-303	ROTARY STYLE, CAST IRON	OIL-BASED FLUIDS	WATER-BASED FLUIDS, SOLVENTS, WEAK ACIDS, ANTIFREEZE, GASOLINE, OR DIESEL			
75-846	ROD STYLE	WATER-BASED FLUIDS, OIL-BASED Fluids, and gasoline				

# HELPFUL HINTS



**WATER-BASED** materials attack **unplated steel** (rust).



**SOLVENTS** attack **lubricated parts** (break down lubricants), and also attack **rubber parts** (dissolve rubber).



ACIDS attack nickel plating and unplated steel (corrosion).



## POLYPROPLENE AND NYLON

are **resistant** to some chemicals (see chart).

# OILERS / ADHESIVE GUNS

## **PISTOL OILERS**

Drawn steel bodies. Rugged epoxy finish resists rust.

- 6 oz. size available with or without base holder.
- Rigid spouts have .15" diameter ledge-cone machined tips to lift oil filler dust caps.



**50-509CC** Case-cut box. 6 oz. capacity with 6" rigid spout. Labeled. 10/master



**50-515** 6 oz. capacity with base holder and 6" rigid spout. Labeled. 10/master



**50-516** 6 oz. capacity with base holder and 6" flex spout. Labeled. 10/master



**50-573** 1 pint capacity with 6" flex spout. Boxed. 1/master



**50-583** 1 quart capacity with 6" rigid spout. Boxed. 1/master



**50-595** 8 oz. capacity with 6" flex spout. Boxed. 6/master

## HANDLED OILER



Heavy duty, drawn steel bodies. Durable, epoxy finish bodies resist rust.

- Zinc-plated, detachable flex sprout with 1/2"–20 thread base.
- Detachable tip threaded 10-32 with closure cap.

**50-337** 1 pint capacity with 9" flex spout. Boxed. 5/master

50-347 1 quart capacity with 9" flex spout (not shown). Boxed. 24/master

## **PLASTIC OILERS**



**50-590** 6 oz. capacity with 4-1/2" spout. Labeled. 6/master



**50-592** 6 oz. capacity with 7-1/2" flex spout. Labeled. 6/master

## **ADHESIVE GUNS**

Feature zinc die-cast caps, 4" zinc-plated spouts and heavy duty triggers. Spout tips have 12–32 threads. Spout bases have 3/8"–24 threads. Brush tip available. Durable epoxy finish bodies. Pump most non-corrosive fluids which will seek their own level. Not recommended for water-based adhesives. Tip I.D.055".



**30-955** 1 pint with 4" spout. Boxed. 1/master

**30-956** Replacement spout for 30-955 (not shown). Bulk. 100/master

**99-619** Brush tip for adhesive guns (not shown).
Bagged. 1/master



**30-960** 1 pint with long adapter. Boxed. 1/master



**30-962** 6-3/4" pump and adapter. Boxed. 1/master

# FILTER WRENCHES

## **STANDARD FILTER WRENCHES**



## **ECONOMY STANDARD FILTER WRENCHES**

Standard fixed handle with vinyl grip.

**70-535** Small. Fits 2-9/16" to 3-1/8" (65–79 mm). Carded. 6/master

70-536 Medium. Fits 3-1/2" to 3-7/8" (89-98 mm). Carded. 6/master



## **ECONOMY ADJUSTABLE FILTER WRENCH**

4-way adjustable band fits a wide range of sizes. Wide band prevents crushed filters.

**70-805** 2-3/4" to 4" (70–102 mm). Carded. 10/master



## PRO-TUFF® STANDARD FILTER WRENCH

**70-605** Medium. Fits 3-1/2" to 3-7/8" (89–98 mm). Carded. 10/master

**70-607** Large. Fits 4-1/8" to 4-1/2" (105–114 mm). Carded. 5/master

**70-609** Truck. Fits 4-3/4" to 5-1/8" (120–130 mm). Carded. 5/master

**70-611** Tractor. Fits 5-3/8" to 5-3/4" (136–146 mm). Carded, 5/master

## **SWIVEL FILTER WRENCHES**



#### **ECONOMY SWIVEL FILTER WRENCHES**

For hard-to-reach jobs. Feature a swivel handle with vinyl grip to easily clear obstructions.

**70-537** Medium. Fits 3-1/2" to 3-7/8" (89–98 mm). Carded. 6/master

**70-538** Small. Fits 2-9/16" to 3-1/8" (65–79 mm). Carded. 6/master

**70-539** Compact. Fit 2-1/4" to 2-1/2" (57–63 mm). Carded. 6/master



#### **PRO-TUFF® SWIVEL FILTER WRENCHES**

Extra heavy duty construction with studded steel band. Feature a lock nut for setting angles and tightening handle and a tough non-slip grip. These wrenches with their swivel handle design make removing hard-to-reach filters easy. 1" band.

**70-621** Compact. Fits 2-1/4" - 2-9/16" (57–65 mm). Carded. 10/master

**70-623** Small. Fits 2-13/16" to 3-5/32" (71–80 mm). Carded. 10/master

**70-625** Medium. Fits 3-1/2" to 3-7/8" (89–98 mm). Carded. 10/master

**70-627** Large. Fits 4-1/8" to 4-1/2" (105–114 mm). Carded. 5/master

## **BAND FILTER WRENCHES**



## PRO-TUFF® 3/8" RACHET DRIVE

Low profile design for easy access to hard to reach filters. Heavy duty hardened link and 1" studded steel band. Use with 3/8" drive extension.

**70-635** Fits 2-13/16" to 3-5/32" (71–80 mm). Carded. 10/master



## 2" BAND, PRO-TUFF® HEAVY DUTY TRUCK 1/2" RATCHET DRIVE

**70-761** Fits 4-1/8" to 4-21/32" (105–118 mm). For Ford/Internationals 6.9, 7.1 and most Mack engine filters. Carded. 5/master

**70-763** Fits 4-21/32" to 5-1/8" (118–130 mm). Carded. 5/master

**70-765** Fits 5-5/32" to 5-21/32" (131–143 mm). Boxed, 1/master

## **CAP FILTER WRENCHES**

**70-786** 15 flutes. 3-21/32" (93 mm). Carded. 4/master

**70-787** 15 Flutes. 2-29/32" & 3" (74 & 76 mm). Carded. 4/master

**70-790** 14 flutes. 2-35/64" & 2-11/16" (65 & 68 mm). Carded. 4/master

**70-792** 14 flutes. 2-7/8" (73 mm). Carded. 4/master



## MISCELLANEOUS FILTER WRENCHES



## PLIERS-STYLE FILTER WRENCH

Comfortable vinyl grips and black oxide finish. Special slip-joint handle. 20° jaw angle and slim pliers design gets into areas other wrenches can't.

**70-746** Fits 2-1/2" to 4-5/8" (63-117 mm). Carded. 5/master

Special locking handle and non-slip grip ensure maximum hold.

**70-748** Fits 2-1/8" to 4-5/8" (54–117 mm). Carded. 3/master



## **NYLON STRAP FILTER WRENCH**

**70-719** Sturdy, non-slip nylon belt with 1/2" square drive. Fits filters up to 6". Carded. 5/master




#### 2-PIECE STRAP WRENCH SET

**70-720** Multi-purpose strap wrenches with adjustable, durable rubber strap. Fits almost any object.

Regular: 3/8" to 5-1/4" (9.5–133 mm) Large: 1" to 6-1/2" (25.4–165 mm)

Carded. 3/master



#### **BI-DIRECTIONAL FILTER WRENCHES**

2-way filter wrench removes and installs oil filters. Fits most domestic and imported cars and trucks. Designed to fit where standard wrenches can't. Use with 3/8" square drive or 7/8" open/combination wrench.

**70-715** Small. 2-13/16" to 3-1/16" (71 mm–78 mm) Carded. 5/master

**70-717** Large. 3-3/8" to 3-11/16" (86 mm–93 mm) Carded. 3/master

# **FUNNELS**

## **GALVANIZED STEEL FUNNELS**

Heavy duty steel funnels. Capacity indicates what the funnels will hold when the outlet is blocked.



**75-001** 1 quart capacity, 7" total height, 6" diameter, 3/4" OD tip. Labeled. 12/master



**75-002** Offset, 5 quart capacity, 11" total height, 10" diameter, 1-1/4" OD tip with screen. Labeled. 6/master



**75-003** 2 quart capacity, 8" total height, 8" diameter, 3/4" OD tip. Labeled. 6/master



**75-004** Tractor, 8 quart capacity, 12" total height, 9-1/2" diameter, 1" OD tip with screen. Labeled. 6/master



**75-008** Lock-on tractor, 8 quart capacity, 11-1/2" total height, 10" diameter, 1-1/4" OD tip with screen and tabs. Labeled. 6/master



**75-017** 7 pint capacity, 8-3/4" total height, 9-3/4" diameter, 7/8" OD tip. Labeled. 12/master

## **GALVANIZED STEEL UTILITY FUNNELS**

Lightweight, general purpose steel funnels. Capacity indicates what the funnel will hold when the outlet is blocked.



**75-009** 10 oz. capacity, 5-1/2" total height, 4-1/2" diameter, 1/2" OD tip. Labeled. 12/master

**75-010** 24 oz. capacity, 6-1/2" total height, 5-3/4" diameter, 1/2" OD tip. Labeled. 12/master

**75-011** 32 oz. capacity, 7-1/2" total height, 6-1/2" diameter, 5/8" OD tip. Labeled. 12/master

**75-012** 56 oz. capacity, 9" total height, 8" diameter, 5/8" OD tip. Labeled. 12/master

## **FUNNEL FILLERS**

## TRANSMISSION FUNNELS

Rugged epoxy finish. Offset design, 2 quart capacity. 7" diameter. Includes fine mesh strainer screen.



**75-005** With 2" length (1" OD) rigid tip. Labeled. 5/master



**75-006** With 17" flexible metal extension and 5/8" OD tapered tip to fit transmission tubes, etc. 28" overall length. Labeled. 5/master



## **UTILITY FUNNEL**

Ideal for transmission fluid. Galvanized steel. Includes screen and 12" flexible extension with taper tip. Tip 5/8" OD.

## 75-007

1 quart capacity, 5-3/4" diameter, 17-1/2" overall length. Labeled. 10/master



#### **UTILITY FUNNEL**

Complete with a 13" flexible neoprene hose. 1/2" OD tip.

**75-101** 1/2 pint capacity, 4-1/2" diameter, 17" overall length. Labeled. 10/master

## **PLASTIC FUNNELS**

#### **ECONOMY PLASTIC FUNNELS**

Durable, oil and gasoline resistant plastic. Safe for all petroleum products, complete with handy storage hanging tabs. Capacity indicates what the funnel will hold when the outlet is blocked.



**75-060** 8 oz. capacity, 5" total height, 4-1/2" diameter, 1/2" OD tip. Labeled. 20/master



**75-062** 16 oz capacity, 5-1/2" total height, 6" diameter, 7/8" OD tip. Labeled. 24/master



**75-064** 48 oz. capacity, 7" total height, 8" diameter, 3/4" OD tip. Labeled. 24/master

# LONG NECK PLASTIC FUNNEL All-purpose utility funnel. Extra long neck to reach out-of-the-way spots. 75-068 2 quart capacity, 18" overall length, 5" diameter, 5/8" OD tip. Labeled. 12/master

## PLASTIC FUNNELS

## **POLYETHYLENE PLASTIC FUNNELS**

Rugged, corrosion-resistant, all-purpose funnels. Complete with fine mesh straining screen and handy hanging tab. Capacity indicates what the funnel will hold when the outlet is blocked.



**75-069** 1 pint capacity, 5.1" total height, 5.5" diameter, 1" OD tip. Labeled. 10/master



**75-070** 2 quart capacity, 9" total height, 7" diameter, 1" OD tip. Labeled. 10/master



**75-072** 6 quart capacity, 11" total height, 9" diameter, 1-1/2" OD tip. Labeled. 5/master



75-074



A multi-purpose 2-piece funnel with 12" detachable flexible spout. The funnel includes an easy-grip handle.

**75-074** 15" overall length, 6" diameter with 3/4" OD tip. Labeled. 12/master

**60-200** Spout only. 2 thread sizes to fit most containers. Labeled. Bulk. 10/box



## **3-PIECE FUNNEL SET**

**75-075** Includes 1/2 pint, 1 pint, 2 pint plastic funnels. Labeled. 12/master

# MEASURERS / FILLERS

## **GALVANIZED MEASURERS**

Deluxe measurers with spill-resistant tops. Flexible spouts for ease of pouring. Rolled edge, easy-grip handles. Calibrated fill line. 1/2" OD tip.



**75-441** 1 quart capacity, 6-1/2" overall height.



**75-442** 2 quart capacity, 9-1/2" overall height.



**75-444** 4 quart capacity, 11" overall height. Labeled. 6/master

## **PLASTIC MEASURES**

Marked in quarts and liters. Easy-grip handle. Rigid spout is angled for ease of pouring.



**75-452** 2 quart capacity, 1" OD spout. Labeled. 10/master



**75-454** 4 quart capacity, 1" OD spout. Labeled. 10/master



**75-456** 6 quart capacity, 1-1/4" OD spout. Labeled. 10/master

## PAINTED MEASURES

With flexible spouts. Designed for one-hand operation. Thumb operated valve controls flow; flip action locks valve open. 14" flexible metal spout with tapered 1/2" OD tip swings into the necessary angle for hard-to-reach jobs. Recessed bottoms drain fully and guard against puncture. Rolled edge top helps prevent oil spillage.



**75-662**2 quart capacity.
8" overall height.
Labeled. Boxed. 1/master



**75-664**4 quart capacity.
9-1/2" overall height.
Labeled. Boxed. 1/master



**75-665**5 quart capacity.
9-1/2" overall height.
Labeled. Boxed. 1/master



**75-668** 8 quart capacity. 11-1/2" overall height. Labeled. Boxed. 1/master

## RADIATOR / BATTERY FILLERS



**RADIATOR FILLER** 

**75-025** 3 gallon capacity. Impervious to oil, gasoline and antifreeze. Labeled. 4/master



#### **AUTOMATIC BATTERY FILLER**

**75-030** 2 quart capacity. Shuts off automatically when battery cell is at proper level. Labeled. 10/master

**99-038** Spout tip replacement. Bulk. 25/box



## **BATTERY FILLER**

**75-033** 6 ounce capacity. Ideal for all fluids including battery acid. Bagged. 10/master

## **GALVANIZED CONTAINERS**



## **RADIATOR DRAIN PAN**

Heavy duty galvanized steel. Pouring with anti-splash baffle prevents spilling. Rolled smooth edge and ribbed bottom for heavy duty strength. Includes handles.

**75-750** 8 gallon capacity, 19" diameter x 7.25" high. Labeled. 2/master



## **UTILITY DRAIN PAN**

Seamless, full drawn galvanized steel. Rolled rim and ribbed bottom for extra strength.

**75-751** 3-1/2 gallon capacity, 16" diameter x 4" high. Labeled. 12/master



## **DRIP PAN**

Rugged galvanized sheet metal construction. Rust-resistant. Protects driveways, garage or automotive show room floors from fluid drippings. Rolled edges for extra strength.

**75-755** 17-1/2" x 25-3/4" x 1" high. Labeled. 10/master



## **WATER PAIL**

Made of rust-resistant galvanized sheet metal.

**75-825** 12 quart capacity, 11" diameter x 9-1/2" high. Labeled. 6/master

## **PLASTIC CONTAINERS**



## 20 GALLON TIRE AND TUBE TEST TANK

Rugged high density polyethylene plastic construction. Large enough to handle passenger car and light duty truck tires. Lip doubles as a splash guard and easy carrying handle. Tire punctures are easy to spot against black plastic tank.

**75-754** 31" x 12" x 12" size. Labeled. 1/master



## **SMALL PLASTIC DRAIN PAN**

With pouring lip. Will not rust, dent or scratch, easy cleaning.

**75-760** 6 quart capacity, 12" diameter x 4" high. Labeled. 10/master



## **LARGE PLASTIC DRAIN PAN**

Tough polyethylene construction that won't rust, dent or scratch. Pouring spout and handle allow for easy, spill-free pouring. Rolled edge cuts down on splash, makes for ease of carrying while full. Easy to clean.

**75-762** 4 gallon capacity, 18" diameter x 5-1/2" high. Labeled, 4/master



#### 15 QUART DRAIN PAN WITH LID

This enclosed drain pan helps make oil changes mess free. The ample 8" opening and screen catch anything aimed in its direction. Seal-able top and wheels make clean up and removal a breeze.

**75-764** 15 quart capacity. 18" x 16" x 6" size. Labeled. 4/master

# LIFT DRAINS

## & ACCESSORIES



#### **16 GALLON LIFT DRAIN**

For use with 16 gallon/120 lb. open head drums (drum not included). Includes telescopic funnel and tube (adjusts from 40-1/2" to 60"), float assembly, drum cover assembly and heavy duty caster base.

75-835 16 gallon capacity. Boxed. 1/master



## 8 GALLON LIFT DRAIN

Sturdy plastic lift drain equipped with wheels, metal drain tube and drain pan with screen. Tube height adjusts to 48" or 63".

**75-850** 8 gallon capacity. Boxed. 1/master

**75-853** Replacement tube and funnel assembly. Boxed. 1/master



## TRANSMISSION PAN ADAPTER

**75-836** For lift drains. Heavy duty, high density polyethylene. Small diameter drain holes in bottom of pan prevent loss of pan bolts. Fits all LubriMatic® and other popular lift drains. Labeled. 6/master

## **5 GALLON LIFT DRAIN**

Telescopic tube adjusts to desired height from 40-1/2" to 60" with 13-1/2" diameter funnel. Comes complete with heavy duty 5 gallon steel container, telescopic tube and sturdy funnel.

**75-837** 5 gallon capacity. Boxed. 1/master

## Replacement Parts:

**75-837-02** Replacement tube and funnel assembly. Boxed. 1/master

#### LIFT DRAIN DOLLY

Heavy steel construction with baked enamel finish, ball bearing type swivel casters. All hardware included.

**75-838** Cross frame style lift drain dolly which fits the LubriMatic® 75-837 lift drain. Boxed. 1/master

## **LUBRIMATIC® GREASES & OILS**

For more than 40 years, LubriMatic<sup>®</sup> has been developing and distributing superior lubrication products. LubriMatic<sup>®</sup> serves the industrial, hardware, marine, automotive and agricultural markets, as well as many industries requiring professional grade lubricants and penetrants.

# GREASE

## MULTI-PURPOSE LITHIUM GREASE (LB)



Long lasting, hard working formula delivers high performance in a wide range of heavy-duty applications. Recommended for chassis, universal joints and other general purpose applications around the home, farm or shop. Works best for lubricating rolling parts. NLGI #2, drop point 350°F.

**11312** 3-pack of 3 oz. cartridges. 12/master

**11315** 14 oz. cartridge. 10/master

11316 16 oz. (1 lb.) can. 12/master

**11328** (not shown) 35 lb. drum

## DISC/DRUM BRAKE WHEEL BEARING

**GREASE (GC-LB)** 



Meets high temperature requirements of all disc and drum brakes and similar applications. Polyurea base. NLGI #2, drop point 520°F.

11380 16 oz. (1 lb.) can. 12/master

**11382** 4 lb. tub w/easy-to-carry handle. 6/master

**11465** 14 oz. cartridge. 10/master

## SYNTHETIC BRAKE CALIPER GREASE (GC-LB)



Our Synthetic Brake Caliper Grease is a 100% synthetic lithium complex lubricant. It delivers excellent performance in both high and low temperature applications. NLGI #2, drop point 500°F.

**11752** 16 oz. (1 lb.) can. 12/master

## LMX® THE "RED" GREASE (GC-LB)



Industrial and agricultural lithium complex formula. Ideal under temperature and pressure extremes, shock loads and high wear situations. Superior adhesion to bearing and moving parts. Highly water insoluble. NLGI #2, drop point 500°F.

**11390** 14 oz. cartridge. 10/master

**11391** (not shown) 35 lb. drum

## WHITE LITHIUM GREASE



Includes zinc additive for a clean, white color. Ideal for general home, shop, automotive, agricultural and industrial applications. Contains no silicons and can be used on plastic components NLGI #2, drop point 350°.

11350 16 oz. (1 lb.). can 12/master

**11354** 14 oz. cartridge. 10/master

**11355** (not shown) 35 lb. drum

**11356** (not shown) 120 lb. drum

11357 4-pack of 3 oz. cartridges. 12/master

**11363** 12 oz. aerosol. 12/master

## CORROSION CONTROL® MARINE

**GREASE (GC-LB)** 



Special calcium sulfonate complex. water insoluble formula ideal for marine applications. Provides excellent corrosion protection under severe conditions caused by salt water and air. Use on wheel bearings (includes disc brake wheel bearings), swivel hinges, pins, winches and anchor chain reels. NGLI #2, drop point 550°F.

11399 3 oz. cartridge 2-pack. 10/master

11400 3 oz. cartridge 4-pack. 10/master (not shown)

**11402** 14 oz. cartridge. 10/master

**11404** 16 oz. (1 lb.) can. 12/master

**11406** 8 oz. tube. 12/master

**11407** 35 lb. drum (not shown)

**11408** 120 lb. drum (not shown)

**11409** 400 lb. drum. (not shown)

## **SPECIALTY GREASES**



## OPEN GEAR & WIRE ROPE SPRAY

# CHAIN & CABLE LUBRICANT

#### DIELECTRIC GREASE

Protects electrical connections from corrosion. Water-resistant, synthetic formulation sheds moisture and doesn't wash away. NLGI #2.

NOTE: Does not conduct electricity

**11755** 2 oz. tube. 12/master

## OPEN GEAR & WIRE ROPE SPRAY LUBE

Reduces wear, withstands extreme pressure.

Will not wash or weather away.

**11473** 11.25 oz. aerosol can. 12/master

## **CHAIN & CABLE LUBRICANT**

Graphite molybdenum formula reduces wear and increases chain life.

**11474** 12 oz. aerosol can. 12/master

## **MOLY EP GREASE (GC-LB)**



Addition of molybdenum disulfide to lithium-based grease makes this lubricant especially effective for sliding motions, such as sleeve journal rotating shafts and ball joints. Contains extreme pressure (EP) additives to reduce scuffing, scoring and seizure with high loads. NLGI #2, drop point 500°F. Contains 3% molybdenum.

**11335** 14 oz. cartridge. 10/master



## PLEWS® MULTI-PURPOSE LITHIUM GREASE

Special economy blend for general purpose use. NLGI #1-1/2, drop point 325°F.

**11309** 16 oz. (1 lb.) can. 12/master

**11310** 14 oz. cartridge. 10/master



## **MOTOR ASSEMBLY GREASE**

A quality white lithium grease with exceptional consistency. Perfect for all engine rebuilding, metal-to-metal and electrical connection applications. NLGI #1, drop point 350°F.

**11395** 8 oz. tube. 12/master

# OIL

## TC-W3® 2-CYCLE OIL



TC-W3 meets the specified requirements of all foreign and domestic 2-cycle outboard manufacturers. Our ashless TC-W3 is formulated from ultra-clean base stock oil to provide superior protection against piston scuffing, bearing wear, spark plug fouling, pre-ignition and rust. This formulation has outstanding lubricity and miscibility for better mixing of fuel and oil, resulting in a cleaner running engine. Contains no phosphorus. Will not void manufactures' warranties!

## TC-W3® OUTBOARD MOTOR OIL

**11590** 16 oz. bottle. 12/master

**11591** 14 oz. bottle. 10/master

11592 1 gallon container. 6/master



## POWER PRO™ SYNTHETIC BLEND 80W/90 GEAR LUBE

A synthetic blend gear lube that protects high performance lower units in extreme operating conditions. Highly recommended for all engines over 100 hp. Meets or exceeds API MT-1 and GL-5 ratings. Will not void manufactures' warranties.

11564 quart bottle. 12/master

11565 (not shown) 5 gallon drum







## manufactures' warranties.

**11540** 10 oz. tube. 12/master

11546 (not shown) 5 gallon drum

**HIGH VISCOSITY 80W/90 GEAR LUBE** 

Ideal for modern outboard and stern drive lower units. Meets or exceeds API MT-1 and GL-5 ratings. Will not void

11552 Quart bottle. 12/master



## **HYPOID 90 GEAR LUBE**

For mechanical shift outboards and stern drives. Meets U.S. Military Spec MIL-PRF-2105E and API MT-1 and GL-5 ratings. Will not void manufactures' warranties.

11556 Quart bottle. 12/master



#### **POWER TRIM AND TILT FLUID**

Formulated to provide viscosity and lubricity necessary to ensure proper pump performance and seal life. Combats high operating pressures and resists rust. Anti-foam and extreme pressure additives ensure excellent stability and shear resistance.

**11578** 10 oz. tube. 12/master

## MARINE LOWER UNIT KITS



## MARINE LOWER UNIT LUBE KIT

Includes one quart of High Viscosity Lower Unit Gear Lube (11552), and one Lower Unit Quart Pump (55-005), with 3/8"-16 Filler Fitting for Mercury, Mercruiser, OMC, Evinrude, Johnson, Volvo, Force, Gamefisher and Honda (70 hp and up) outboard engines.

11246 Clamshell. 6/master



#### MARINE LOWER UNIT FILL KIT

Kits includes two 10 oz. tubes of High Viscosity Lower Unit Gear Lube (11540) and one filler tube for Mercruiser, OMC, Evinrude, Johnson, Volvo, Force and Gamefisher models.

11101 Clamshell. 6/master

## LAWN & GARDEN OIL



#### POWER LAWN MOWER 4-CYCLE OIL

Perfect for any 4-cycle air cooled engine such as those in lawn mowers, tillers, garden tractors and snow throwers. SAE30.

**11531** 20 oz. bottle. 12/master



## **CHAIN SAW BAR AND CHAIN OIL**

Formulated to extend chain, bar and sprocket life. Protects against rust and corrosion with minimum "throw off" at high chain speeds. Resists thinning and freezing caused by temperate extremes.

11532 Quart bottle. 12/master

## 2-CYCLE OIL



#### **EZ 2-CYCLE OIL**

No guessing with this handy oil. One bottle treats one gallon of gas, works in any ratio from 16:1 to 50:1.

**11524** 3.2 oz bottle. 48/master



## 2-CYCLE ENGINE OIL

Formulated to improve performance, extend engine life and reduce plug fouling. Provides excellent wear protection and high temperature performance. Recommended for chain saws, trimmers, motorcycles, snow blowers, mowers and other air cooled 2-cycle engines.

**11525** 8 oz. bottle. 24/master

**11527** Quart bottle. 12/master



## TC-W3® 2-CYCLE SNOWMOBILE OIL

Formulated for use in snowmobiles and other 2 cycle oil injection cold weather equipment requiring ashless TC-W3 oil. Excellent performance down to -40°.

**11462** Quart bottle. 12/master

## **GEAR LUBE**



## **SAE 80W/90EP**

Premium blend contains extreme pressure additives to provide heavy-duty protection. Recommended for automotive, tractor, truck and industrial applications such as manual transmissions, differentials or other gear boxes which require heavy-duty multi-purpose lubricant. Meets API MT-1, GL-5, MIL-PRF-2105E, SAEJ2360 and Mack GO-G/H/J specifications.

**11500** Quart bottle. 12/master

11507 Gallon container. 6/master



#### **SAE 85W/140 EP**

Formulated with EP additives to exceed most extreme performance requirements. Withstands severe shock, high torque loads and wide temperature variations. Meets API MT-1, GL-5, MIL-PRF-2105E, SAEJ2360 and Mack GO-G/H/J specifications.

11505 Quart bottle. 12/master

## SPECIALTY OILS



## **FOGGING OIL**

Protects internal components of 2 and 4-cycle engines from rust, corrosion or seizing during seasonal storage.

**11412** 9.75 aerosol can. 12/master

# REFERENCE GUIDES

## **QUICK REFERENCE GREASE CHART**

This chart indicates general specifications and application of petroleum-based greases available from LubriMatic<sup>®</sup>. Please contact our customer service department or representative for further details.

LUBRIMATIC® Grease	GRADE	DROP Point	WATER Washout	4 BALL WELD (KGF)	4 BALL Scar (MM)	TIMKEN OK LOAD	BASE (SOAP/THICKENER)	TEXTURE	COLOR
DISC/DRUM Wheel Bearing Grease	2	520°F	EXCELLENT	500	<0.6	50	POLYUREA	SMOOTH	BLUE
DIELECTRIC Grease	2	NONE	OUTSTANDING	N/A	N/A	N/A	SYNTHETIC	BUTTERY	AMBER
LMX® THE "RED" Grease	2	500°F	EXCELLENT	315	0.6	45	LITHIUM COMPLEX	TACKY	RED
CORROSION CONTROL MARINE GREASE	2	550°F	OUTSTANDING	620	0.45	65	CALCIUM SULFONATE	SMOOTH	GREEN
MOLY EP GREASE	2	500°F	EXCELLENT	350	0.4	45	LITHIUM COMPLEX	SMOOTH	GRAY
MOTOR ASSEMBLY WHITE GREASE	1	350°F	GOOD	250	0.6	N/A	LITHIUM 12-HYD. Stearate	SMOOTH	OFF WHITE
MULTI-PURPOSE Lithium Grease	2	350°F	VERY GOOD	N/A	<0.6	30	LITHIUM 12-HYD. Stearate	SMOOTH	GRAY- Black
SYNTHETIC BRAKE CALIPER GREASE	2	500°F	EXCELLENT	315	0.55	40	LITHIUM COMPLEX	SMOOTH	BLUE
WHITE LITHIUM Grease	2	350°F	VERY GOOD	250	0.6	35	LITHIUM 12-HYD. Stearate	SMOOTH	OFF White

## **GREASE COMPATIBILITY CHART**

## RELATIVE COMPATIBILITY RATING

- C = COMPATIBLE
- N = NOT RECOMMENDED
- I = INCOMPATIBLE

It is important to determine compatibility prior to mixing greases of different base types. Incompatible greases can cause adverse chemical reactions, resulting in rust, pitting, scoring of metal, and breakdown of the grease's ability to lubricate.

THICKENER OR SOAP TYPE	ALUMINUM COMPLEX	BARIUM COMPLEX	CALCIUM STEARATE	CALCIUM 12-HYDROXY	CALCIUM COMPLEX	CALCIUM SULFONATE COMPLEX	CLAY (NON-SOAP)	LITHIUM STEARATE	LITHIUM 12-HYDROXY	LITHIUM COMPLEX	POLYUREA (CONVEN. 1ST GEN.)	LUBRIMATIC® TYPE.)
ALUMINUM COMPLEX	N	I	I	C	I	N	I	I	I	C	I	1
BARIUM COMPLEX	1	-	1	C	I	C	I	I	I	I	I	N
CALCIUM STEARATE	1	I	-	C	I	C	C	C	N	C	I	C
CALCIUM 12-HYDROXY	C	C	C	-	N	N	C	C	C	C	I	C
CALCIUM COMPLEX	- 1	I	I	N	-	I	I	I	I	C	C	C
CALCIUM SULFONATE COMPLEX	N	C	C	N	1	-	1	N	N	C	1	C
CLAY (NON-SOAP)	- 1	I	C	C	I	I	-	I	I	I	I	N
LITHIUM STEARATE	- 1	I	C	C	I	N	I	-	C	C	I	C
LITHIUM 12-HYDROXY	- 1	I	N	C	I	N	I	C	-	C	I	C
LITHIUM COMPLEX	C	1	C	C	C	C	I	C	C	-	I	C
POLYUREA (Conven. 1st gen.)	ı	I	I	I	C	I	I	I	I	I	-	C
POLYUREA (Lubrimatic® type)	C	N	C	C	C	C	N	C	C	C	C	-

Part#	Description	Page	Part#	Description	Page
05-019	1.5" Needle Nose Adapter	21	11-963	Fitting Assortment - Metric - 25-Piece	23
05-021	Push Type Adapter	20	30-100	Standard Mini Grease Gun	8
05-025	4" Needle Nose Adapter	21	30-108	Portable Transfer Pump w/Hose	28
05-026	Quick Connect Locking Coupler	19	30-111-07	Heavy Duty 6 In Grease Hose - Bulk	14
05-028	Standard Coupler Bulk - 10	16	30-114	Air Operated Grease Gun	7
05-030	Standard Coupler Bulk - 100	16	30-118	Suction Gun W/Hose	14
05-031	Standard Grease Gun Coupler	16	30-132	Economy Mini Grease Gun Kit	8
05-031-2	Standard Coupler 2 Pack	16	30-132-07	Economy Mini Grease Gun - Bulk	8
05-031-6	Standard Coupler 6 Pack	16	30-190	Mini Grease Gun Kit - Marine	8
05-034	Heavy Duty Coupler Bulk	16	30-192	Mini Grease Gun Kit - Multi-Purpose	8
05-035	Heavy Duty Grease Coupler	16	30-193	Standard Mini Grease Gun - Bulk	8
05-036	Extreme Duty Grease Coupler	16	30-195	Jiffy Luber w/ Push Type Adapter	14
05-037	Needle Grease Injector	20	30-197	Handi-Grip Pistol Luber®	14
05-038	Extreme Duty Coupler Bulk	16	30-197-07	Handi-Grip Pistol Luber® - Bulk	14
05-039	Air Bleeder Valve	21	30-200	Economy Lever Grease Gun	4
05-041	Seal-Off Dispenser	20	30-203	Standard Duty Lever Grease Gun	4
05-042	Needle Tip Adapter	20	30-300	Standard Pistol Grip Grease Gun	6
05-045	.75" Needle Nose Dispenser	20	30-303	Standard Pistol Grip Grease Gun	6
05-047	Bulk Loader Fitting	21	30-310	Standard Pistol Grip Grease Gun w/Hose	6
05-048	Button Head Coupler - 5/8"	17	30-416	Professional Pistol Grip Grease Gun	6
05-049	Button Head Coupler - 7/8"	17	30-449	Economy Lever Grease Gun - Bulk	4
05-050	180 Degree Swivel Coupler	17	30-465	Industrial Lever Grease Gun - Zinc Barrel	5
05-052	Heavy Duty 360 Degree Swivel Coupler	17	30-475	Industrial Lever Grease Gun	5
05-057	360 Degree Swivel Coupler	17	30-480	Ultimate® Grease Gun	5
05-058	Right Angle Coupler	17	30-601	12V Battery Operated Grease Gun	7
05-059	90 Degree Coupler Adapter	16	30-602	Replacement 12V Battery	7
05-060	7-Piece Grease Gun Accessory Kit	18	30-603	Replacement 12V Battery Charger	7
05-061	5-3/8" Curved Grease Pipe	15	30-613	Replacement Barrel/Plunger - 12V	7
05-065	27-Piece Grease Gun Accessory Kit	18	30-700	UltraView® Lever Action Grease Gun - Red	13
10-200	Standard 12 in Grease Hose	15	30-701	UltraView® Lever Action Grease Gun - Green	13
10-201	Standard 18 in Grease Hose	15	30-720	UltraView® Pistol Grip Grease Gun - Red	13
10-201	Heavy Duty 12" Grease Hose	15	30-721	UltraView® Pistol Grip Grease Gun - Green	13
10-212	Heavy Duty 12" Hose Bulk	15	30-730	UltraView® 18V Battery Operated Grease Gun	13
10-214	Heavy Duty 18" Grease Hose	15	30-740	UltraView® Suction Grease Gun - Red	13
10-219	Heavy Duty 18" Hose Bulk	15	30-741	UltraView® Suction Grease Gun - Green	13
10-217	High Pressure 12" Grease Hose	15	30-750	UltraView® Grease Gun Tube - Red	13
10-512	High Pressure 18" Grease Hose	15	30-751	UltraView® Grease Gun Tube - Green	13
10-514	High Pressure 36" Grease Hose	15	30-753	UltraView® Grease Gun Tube - Black	13
11-100		25	30-754	UltraView® Grease Gun Tube - Blue	13
	Grease Fitting - 1/4" -28 - Short, Straight	25	30-760	UltraView® 1/4"-28 LLPID Washer - Red	13
11-101 11-103	Grease Fitting - 1/4"-28 - Short, Straight Grease Fitting - 1/4"-28 - Short, Straight	25	30-761	UltraView® 1/4"-28 LLPID Washer - Green	13
11-103		25	30-763	UltraView® 1/4"-28 LLPID Washer - Black	13
11-104	Grease Fitting - 1/4"-28 - 45 Degree	25	30-764	UltraView® 1/4"-28 LLPID Washer - Blue	13
11-103	Grease Fitting - 1/4"-28 - 45 Degree	25	30-770	UltraView® 1/8" NPT LLPID Washer - Red	13
11-112	Grease Fitting - 1/4"-28 - 90 Degree	25	30-771	UltraView® 1/8" NPT LLPID Washer - Green	13
11-113	Grease Fitting - 1/4"-28 - 90 Degree Grease Fitting - 1/8" Npt - Short, Straight	25	30-773	UltraView® 1/8" NPT LLPID Washer - Black	13
11-150	Grease Fitting - 1/8" NPT - Short, Straight	25	30-774	UltraView® 1/8" NPT LLPID Washer - Blue	13
11-159	Grease Fitting - 1/8" NPT - 45 Degree	25	30-800	Heavy Duty Mini Grease Gun	9
11-157	Grease Fitting - 1/8" NPT - 90 Degree	25	30-802	Professional Lever Grease Gun	4
11-167		25	30-804	Dual Piston Lever Grease Gun	5
11-107	Grease Fitting - 1/8" NPT - 90 Degree Grease Fitting - 1/4" NPT - Straight	25	30-806	Snaplock® Lever Grease Gun	11
11-218		25	30-807	Snaplock® Pistol Grip Grease Gun	11
	Grease Fitting - 1/8" NPT - 45 Degree		30-955	Adhesive Gun - 1 Pint	33
11-226	Grease Fitting - 6 mm x 1 - Straight	25 25	30-956	4 In Spout Replacement For 30-955	33
11-301	Grease Fitting - 6 mm x 1 - Straight	25	30-960	Adhesive Gun with Long Adapter	33
11-305	Grease Fitting - 6 mm x 1 - 90 Degree	25	30-962	Adhesive Gun with Adapter	33
11-311	Grease Fitting - 8 mm x 1 - Straight	25	50-702	Handled Oiler - 1 Pint - Flex Spout	33
11-313	Grease Fitting - 8 mm x 1 - 45 Degree	25	50-337	Handled Oiler - 1 qt Flex Spout	33
11-315F	Grease Fitting - 8 mm x 1 - 90 Degree	25	50-547 50-509CC	Pistol Oiler - 6 oz Cut Case Display Box	32
11-321	Grease Fitting - 10 mm x 1 - Straight	25	50-50700	Pistol Oiler - 6 oz Rigid Spout	32
11-432	Grease Fitting - 1/4"-28 Straight Drive	25	50-515	Pistol Oiler - 6 oz Flex Spout	32
11-438	Grease Fitting - 3/16" Straight Drive	25	50-573		32
11-447	Grease Fitting - 1/4" Straight Drive	25		Pistol Oiler - 1 Pint - Flex Spout	
11-448	Grease Fitting - 1/4" Straight Drive	25	50-583	Pistol Oiler - 1 qt Rigid Spout	32
11-453	Grease Fitting - 5/16" Straight Drive	25	50-590	Plastic Pistol Oiler - 6 oz Rigid Spout	33
11-902	4-Way 1/8" NPT Grease Fitting Tool - Bulk	22	50-592	Plastic Pistol Oiler - 6 oz Flex Spout	33
11-903	4-Way 1/4"-28 Grease Fitting Tool	22	50-595	Pistol Oiler - 8 oz Flex Spout	32
11-904	4-Way 1/8" Npt Grease Fitting Tool	22	55-001	4 cc Bottle Pump	26
11-912	Drive Fitting Drive-In Tool	22	55-005	4 cc Bottle Pump w/ Metal Marine Adapter	26
11-917	Grease Joint Rejuvenator Tool	22	55-007	4 cc Bottle Pump w/Plastic Marine Adapter	26
11-951	Fitting Assortment - 1/4"-28 - 50-Piece	24	55-012	Bottle Pump - Fitting Only	26
11-953	Fitting Assortment - Standard - 100-Piece	24	55-011	Marine Lower Unit Pail Pump	27
11-954	Fitting Assortment - 1/8" NPT - 50-Piece	24	55-017	Steel Barrel Pump	28
11-955	Fitting Assortment - 1/4"-28 - 8-Piece	23	55-019	Nylon Barrel Pump	28
11-956	Fitting Assortment - Metric - 100-Piece	24	55-107	Bearing Packer Grease Pump	27
11-957	Fitting Assortment - 6 mm x 1 - 8-Piece	23	55-117	Grease Gun Filler Pump	27
11-962			55-123	Heavy Duty Barrel Pump	29

Part#	Description	Page	Part#	Description	Pa
55-124	Professional Barrel Pump	29	75-665	5 qt. Painted Measure	
55-125	Professional Barrel Pump w/Swivel Handle	29	75-668	8 qt. Painted Measure	
55-141	5 Gallon Pail Pump	28	75-750	Radiator Drain Pan	
55-155	Rotary Def Pump	29	75-751	Utility Galvanized Steel Drain Pan	
55-156	Lever Def Pump	29	75-754	Tire And Tube Test Tank	
55-303	Rotary Barrel Pump	28	75-755	Galvanized Steel Drain Pan	
55-440	5 Gallon Lever Action Pail Pump	27	75-760	6 qt. Plastic Drain Pan	
55-441	16 Gallon Lever Action Pail Pump	27	75-762	4 Gallon Plastic Drain Pan w/Spout	
0-200	Easy-Pour Flexible Bottle Spout	41	75-764	15 qt. Plastic Drain Pan w/Lid	
0-025	Bearing Packer	20	75-825	12 qt. Galvanized Steel Water Pail	
0-026	Plastic Bearing Packer	20	75-835	16 Gallon Lift Drain	
0-535	Small Handled Filter Wrench	34	75-836	Plastic Transmission Pan Adapter	
70-536	Medium Handled Filter Wrench	34	75-837	5 Gallon Lift Drain	
0-537	Medium Swivel Handled Filter Wrench	35	75-837-02	Replacement Tube and Funnel for 75-837	
0-538	Small Swivel Handled Filter Wrench	35	75-838	Lift Drain Dolly	
0-539	Compact Swivel Handled Filter Wrench	35	75-846	Multi-Use Transfer Pump	
0-605	Medium Pro-Tuff® Handled Filter Wrench	34	75-847	Siphon Hose	
0-607	Large Pro-Tuff® Handled Filter Wrench	34	75-850	8 Gallon Lift Drain	
0-609	Truck Pro-Tuff® Handled Filter Wrench	34	75-853	Replacement Tube and Funnel Assembly	
0-611	Tractor Pro-Tuff® Handled Filter Wrench	34	99-038	Spout Tip for Automatic Battery Filler	
0-621	Compact Pro-Tuff® Swivel Handle Wrench	35	99-619	Brush Tip for Adhesive Guns	
0-623	Small Pro-Tuff® Swivel Handle Wrench	35			
0-625	Medium Pro-Tuff® Swivel Handle Wrench	35	11101	Marine Lower Unit Fill Kit	
0-627	Large Pro-Tuff® Swivel Handle Wrench	35	11246	Marine Lower Unit Lube Kit	
0-635	Pro-Tuff® 3/8" Ratchet Drive Filter Wrench	36	11309	Plews® Multi Purpose Grease 1 lb. Can	
0-635	Small Bi-Directional Filter Wrench	37	11309	·	
D-715 D-717	Large Bi-Directional Filter Wrench	37	11310	Plews® Multi Purpose Grease 14 oz. Cartridge	
0-717		37	11312	Multi-Purpose Grease 3 oz 3 Pack Multi-Purpose Grease 14 oz. Cartridge	
	Strap Type Filter Wrench			1	
0-720	2-Piece Strap Type Filter Wrench	37	11316	Multi-Purpose Grease 16 oz. Can	
0-746	Pliers Type Filter Wrench	37	11328	Multi-Purpose Grease 35 lb. Drum	
0-748	Locking Pliers Type Filter Wrench	37	11335	Moly EP Multi-Purpose Grease 14 oz.	
0-761	Small Pro-Tuff® 1/2" Ratchet Drive Wrench	36	11350	White Lithium Grease 16 oz. Can	
0-763	Medium Pro-Tuff® 1/2" Ratchet Drive Wrench	36	11354	White Lithium Grease 14 oz. Cartridge	
0-765	Large Pro-Tuff® 1/2" Ratchet Drive Wrench	36	11355	White Lithium Grease 35 lb. Drum	
0-786	93 mm Steel Cap Filter Wrench	36	11356	White Lithium Grease 120 lb. Drum	
0-787	74-76 mm Steel Cap Filter Wrench	36	11357	White Lithium Grease 3 oz 4 Pack	
0-790	65-68 mm Steel Cap Filter Wrench	36	11363	White Lithium Grease 12 oz. Aerosol Can	
0-792	73 mm Steel Cap Filter Wrench	36	11380	High Temp Wheel Bearing Grease 16 oz. Can	
0-805	Adjustable Handled Filter Wrench	34	11382	High Temp Wheel Bearing Grease 4 lb. Tub	
0-901	Grease Gun Holder	19	11390	LMX® "Red" Grease 14 oz. Cartridge	
0-902	Grease Gun Holder - Bulk	19	11391	LMX® "Red" Grease 35 lb. Drum	
0-904	Grease Gun Bracket	19	11395	Motor Assembly Grease 8 oz. Tube	
5-001	1 qt. Galvanized Steel Funnel	38	11399	Corrosion Control® Marine Grease 3 oz 2 Pack	
5-002	5 qt. Offset Galvanized Steel Funnel	38	11400	Corrosion Control® Marine Grease 3 oz 4 Pack	
5-003	2 gt. Galvanized Steel Funnel	38	11402	Corrosion Control® Marine Grease 14 oz. Cartridge	
5-004	8 qt. Tractor Galvanized Steel Funnel	38	11404	Corrosion Control® Marine Grease 16 oz. Can	
5-005	Rigid Spout Transmission Filler	39	11406	Corrosion Control® Marine Grease 8 oz. Tube	
5-006	Transmission Filler W/Flex Extension	39	11407	Corrosion Control® Marine Grease 35 lb. Drum	
5-007	1 qt. Steel Utility Funnel w/Flex Extension	39	11408	Corrosion Control® Marine Grease 120 lb. Drum	
5-008	8 qt. Lock-On Tractor Steel Funnel	38	11409	Corrosion Control® Marine Grease 400 lb. Drum	
5-006	10 oz. Steel Utility Funnel	39	11409	Fogging Oil 9.75 oz. Aerosol Can	
5-009	, , , , , , , , , , , , , , , , , , , ,	39	11412	TC-W3® 2-Cycle Snowmobile Oil	
	24 oz. Steel Utility Funnel	39		•	
5-011	32 oz. Steel Utility Funnel		11465	Disc/Drum Bearing Grease 14 oz. Cartridge	
5-012	56 oz. Steel Utility Funnel	39	11473	Open Gear & Wire Rope Spray Lube 11.25 oz. Aerosol	
5-017	7 Pint Galvanized Steel Funnel	38	11474	Chain & Cable Lubricant 12 oz. Aerosol Can	
5-025	Radiator Filler	43	11500	SAE 80W/90EP Gear Lube 1 qt. Bottle	
5-030	Automatic Battery Filler	43	11505	SAE 85W/140EP Gear Lube 1 qt. Bottle	
5-033	Battery Filler	43	11507	SAE 80W/90EP Gear Lube 1 Gallon Container	
5-060	8 oz. Economy Plastic Funnel	40	11524	EZ-2 Cycle Oil 3.2 oz. Bottle	
5-062	16 oz. Economy Plastic Funnel	40	11525	2-Cycle Engine Oil 8 oz. Bottle	
5-064	48 oz. Economy Plastic Funnel	40	11527	2-Cycle Engine Oil 1 qt. Bottle	
5-068	Long Neck Plastic Funnel	40	11531	Power Lawn Mower 4-Cycle Oil 20 oz. Bottle	
5-069	1 Pint Plastic Funnel w/Screen	41	11532	Chain Saw Bar And Chain Oil 1 qt. Bottle	
5-070	2 qt. Plastic Funnel w/Screen	41	11540	High Viscosity 80W/90 Gear Lube 10 oz. Tube	
5-072	6 qt. Plastic Funnel w/Screen	41	11546	High Viscosity 80W/90 Gear Lube 5 Gallon Bucket	
5-074	2-Piece Funnel w/Flexible Spout	41	11552	High Viscosity 80W/90 Gear Lube 1 qt. Bottle	
5-075	3-Piece Assorted Plastic Funnels	41	11556	Hypoid 90 Gear Lube 1 qt. Bottle	
5-101	8 oz. Utility Plastic Funnel w/Hose	39	11564	Power Pro™ Synthetic Gear Lube 1 qt. Bottle	
5-441	1 gt. Galvanized Measure	42	11565	Power Pro™ Synthetic Gear Lube 5 Gallon Drum	
5-442	2 qt. Galvanized Measure	42	11578	Power Trim And Tilt Fluid 10 oz. Tube	
5-444	4 qt. Galvanized Measure	42	11570	TC-W3® 2-Cycle Outboard Motor Oil 16 oz. Bottle	
5-452	2 qt. Plastic Measure	42	11590	·	
			11591	TC-W3® 2-Cycle Outboard Motor Oil 1 qt. Bottle	
5-454	4 qt. Plastic Measure	42		TC-W3® 2-Cycle Outboard Motor Oil 1 Gallon Bottle	
5-456	6 qt. Plastic Measure	42 43	11752	Synthetic Brake Grease 16 oz. Can Dielectric Grease 2 oz. Tube	
5-662	2 qt. Painted Measure		11755		



## AMERICAN INNOVATION SINCE 1909®

**Amflö** 

**AMFLO** 

PNEUMATIC HOSES & REELS AIR LINE ACCESSORIES

**EDELMANN**®

**EDELMANN** 

AUTOMATIVE FITTINGS
BRAKE LINES
POWER STEERING HOSE & REPAIR KITS

ĹŪbriMatic®

**LUBRIMATIC** 

GREASES, OILS & SPRAY LUBRICANTS LUBRICATION EQUIPMENT

TRU-FLATE®

TRU-FLATE

AIR LINE ACCESSORIES INFLATORS TIRE REPAIR SEALANTS

Plews & Edelmann 1550 Franklin Grove Road, Dixon, IL 61021 USA

Telephone: 800-770-4639 • Fax: 815-673-7019

www.plews-edelmann.com

©2019 plews & edelmann • Printed in the USA